

ARRAY II

AR2.C.D.O.33.840.H.WH



SPECIFICATION TEXT

SURFACE ARRAY, DIRECT LIGHT DISTRIBUTION. LED LIGHT SOURCE UTILISING SQUARE ARRAYS, 4000(K) CCT, HF ELECTRONIC DRIVER, OPAL PMMA DIFFUSING OPTIC. HOUSING FINISHED WHITE. DIMENSIONS : 595 X 595 X 80MM
(TO SUIT STANDARD EXPOSED T CEILING GRID)


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Opal
- Nett luminous flux of luminaire: 3750 lm
- Luminaire efficacy: >113lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 33W
- Driver: HF electronic
- Ingress Protection: IP40
- Emergency: 3hr standard, DALI addressable
- Options: Other ceiling systems

DIMENSIONAL DETAIL

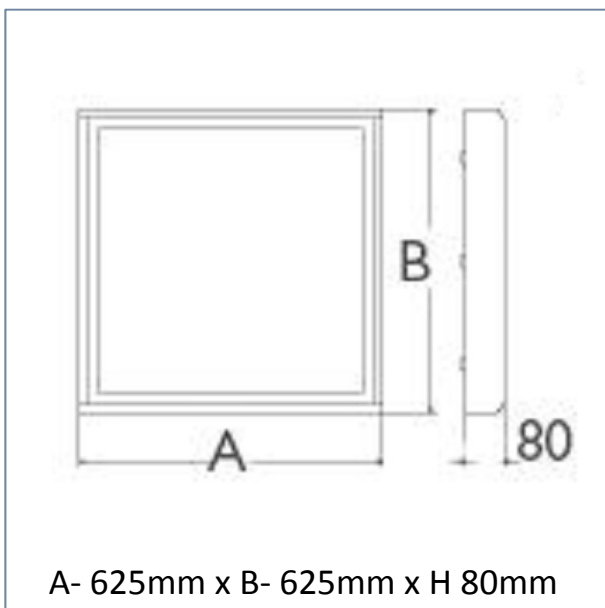

PHOTOMETRIC CURVE

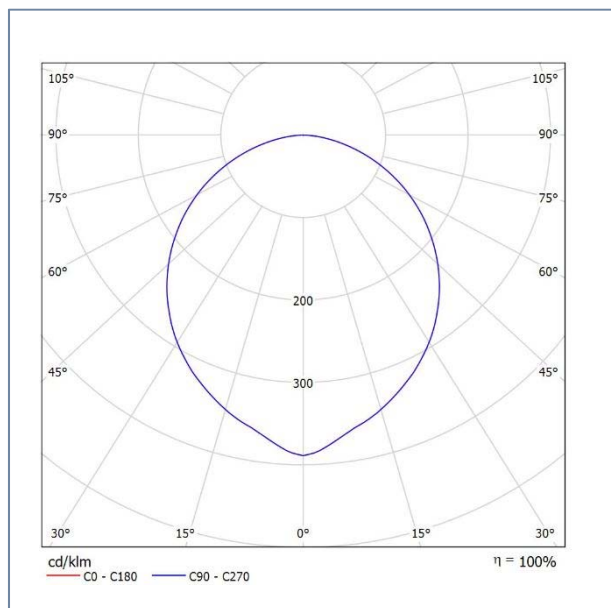

IP20 230 V 50 Hz

