

# ARRAY II


AR2.R4.D.O.80.840.H.WH



## SPECIFICATION TEXT

RECESSED ARRAY, DIRECT LIGHT DISTRIBUTION. LED LIGHT SOURCE UTILISING SQUARE ARRAYS, 4000(K) CCT, HF ELECTRONIC DRIVER, OPAL PMMA DIFFUSING OPTIC. HOUSING FINISHED WHITE. DIMENSIONS : 1195 X 595 X 80MM  
(TO SUIT STANDARD EXPOSED T CEILING GRID)


## PRODUCT IMAGE

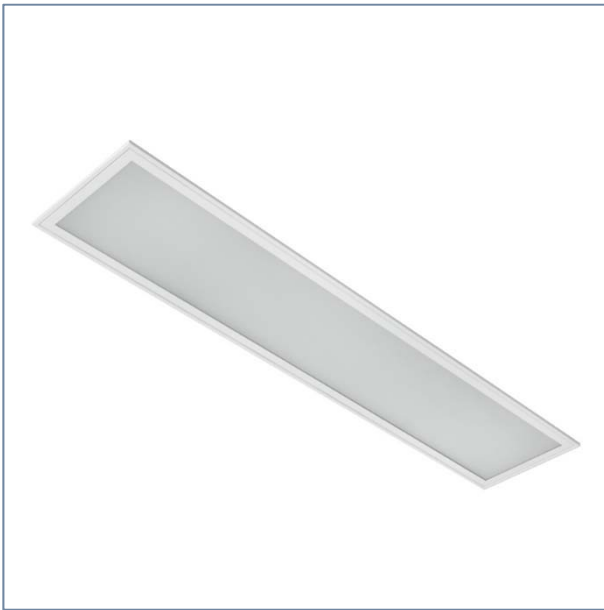


## TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Opal
- Nett luminous flux of luminaire: 9000 lm
- Luminaire efficacy: >112lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 80W
- Driver: HF electronic
- Ingress Protection: IP40
- Emergency: 3hr standard, DALI addressable
- Options: Other ceiling systems

## DIMENSIONAL DETAIL

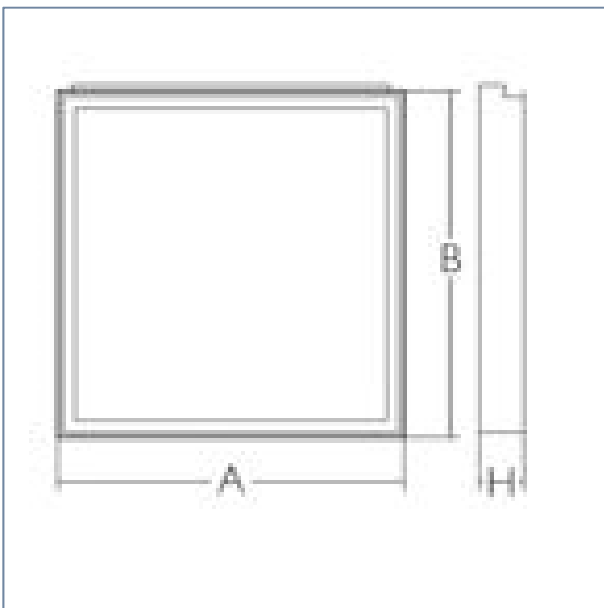

## PHOTOMETRIC CURVE

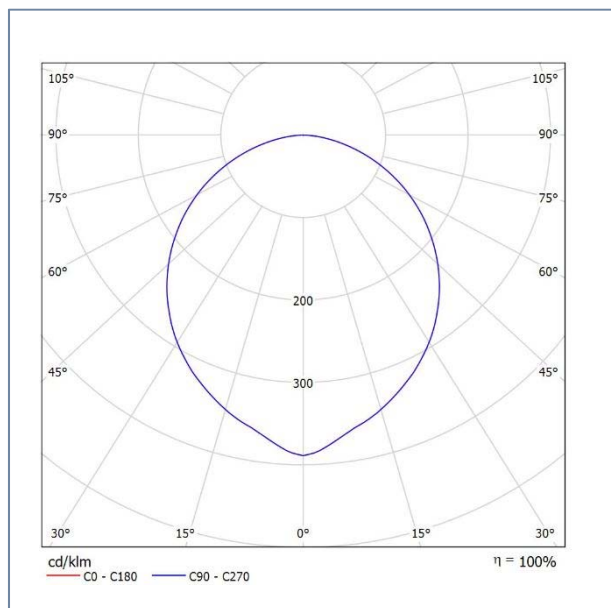

230 V  
50 Hz

