

# CELESTE

CEL.C2.D.O.34.830.H.WH



## SPECIFICATION TEXT

SURFACE CELESTE, DIRECT LIGHT DISTRIBUTION, OPAL POLYCARBONATE DIFFUSING OPTIC, LED LIGHT SOURCE, 3000K CCT, HF LED DRIVER. SHEET STEEL BODY WITH WHITE FINISH. DIMENSIONS: (ØXH) Ø 400 X 80MM


## PRODUCT IMAGE




## TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 3000K
- Optic: Opal polycarbonate
- Nett luminous flux of luminaire: 3540 lm
- Luminaire efficacy: >104 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 34W
- Driver: HF electronic
- Ingress Protection: IP54
- Emergency: 3hr available (also SELF-TEST)
- Options: Sensor, DALI, Corridor, Tunable white

## DIMENSIONAL DETAIL

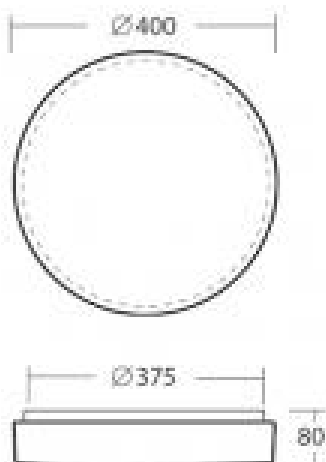

## PHOTOMETRIC CURVE

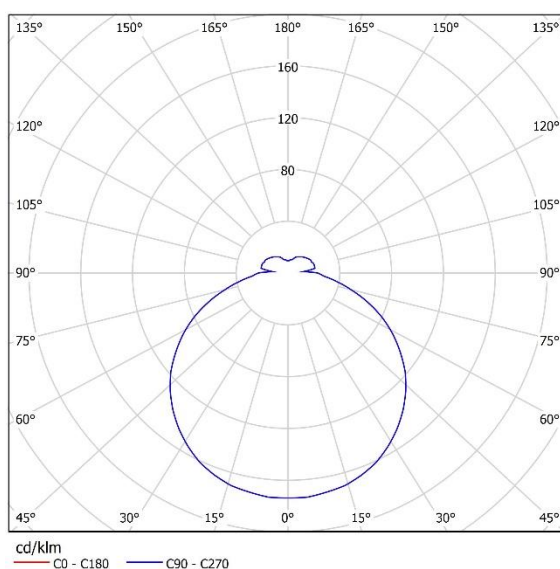

230 V  
50 Hz

