

CELESTE

CEL.C3.D.O.48.840.H.WH



SPECIFICATION TEXT

SURFACE CELESTE, DIRECT LIGHT DISTRIBUTION, OPAL POLYCARBONATE DIFFUSING OPTIC, LED LIGHT SOURCE, 4000K CCT, HF LED DRIVER. SHEET STEEL BODY WITH WHITE FINISH. DIMENSIONS: (ØXH) Ø 500 X 85MM


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Opal polycarbonate
- Nett luminous flux of luminaire: 5330 lm
- Luminaire efficacy: >111 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 48W
- Driver: HF electronic
- Ingress Protection: IP54
- Emergency: 3hr available (also SELF-TEST)
- Options: Sensor, DALI, Corridor, Tunable white

DIMENSIONAL DETAIL

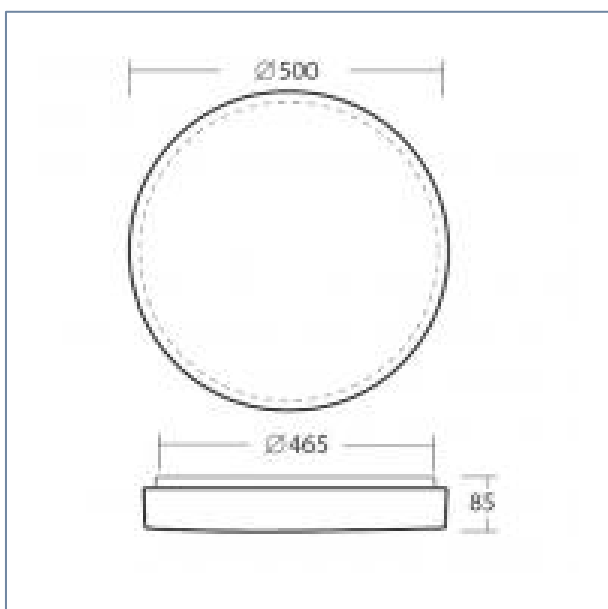

PHOTOMETRIC CURVE

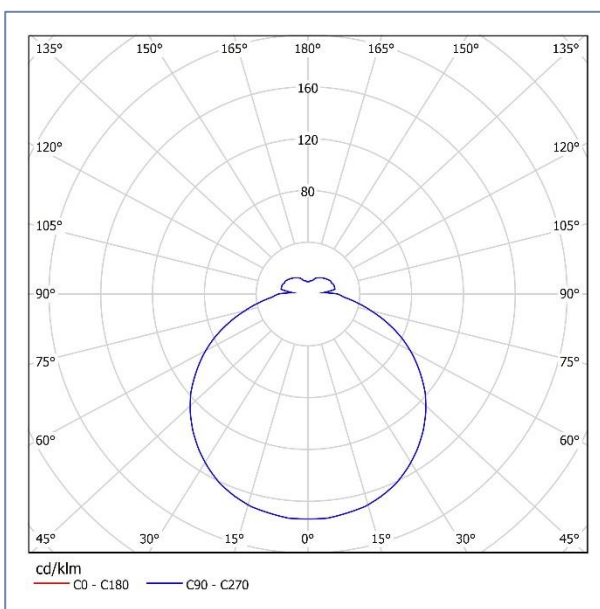

230 V
50 Hz

