

CORE

COR.S.D.O.18.840.H.WH



SPECIFICATION TEXT

SUSPENDED CORE, DIRECT LIGHT DISTRIBUTION, OPAL PMMA DIFFUSING OPTIC, LED LIGHT SOURCE, 4000K CCT, HF LED DRIVER, EXTRUDED ALUMINIUM PROFILE FINISHED WHITE. DIMENSIONS: (LxWxH) 1150 x 90 x 100MM


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Opal
- Nett luminous flux of luminaire: 1902 lm
- Luminaire efficacy: >105 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 18W
- Driver: HF electronic
- Ingress Protection: IP54
- Emergency: 3hr Remote available
- Options:

DIMENSIONAL DETAIL

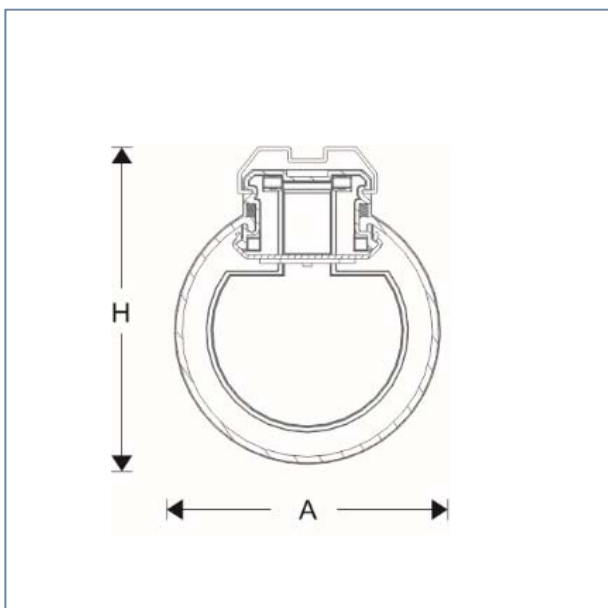

PHOTOMETRIC CURVE

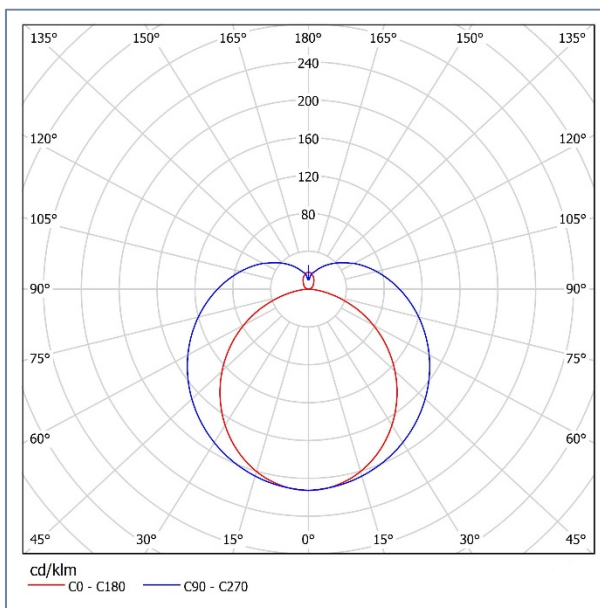

230 V
50 Hz

