

# CIRRO SLIM


CIS.S.T.O.45.840.H.G



## SPECIFICATION TEXT

SUSPENDED MOUNTED CIRRO SLIM, DIRECT / INDIRECT LIGHT DISTRIBUTION (70%, 30%). OPAL & MICRO PRISMATIC OPTIC, LED LIGHT SOURCE, 4000(K) CCT, REMOTE HF ELECTRONIC DRIVER, EXTRUDED ALUMINIUM HOUSING FINISHED SILVER GREY. DIMENSIONS: (LXWXH) 1195 X 295 X 15 MM


## PRODUCT IMAGE

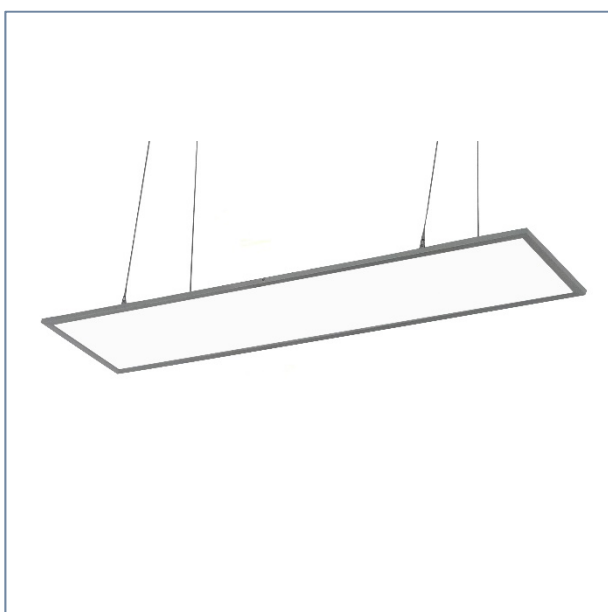


## TECHNICAL DETAILS

- Light Distribution: Direct Indirect
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Opal & Micro prismatic
- Nett luminous flux of luminaire: 3440 lm
- Luminaire efficacy: >76 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 45W
- Driver: Remote HF electronic
- Ingress Protection: IP20
- Emergency: Remote 3hr available
- Options:

## DIMENSIONAL DETAIL

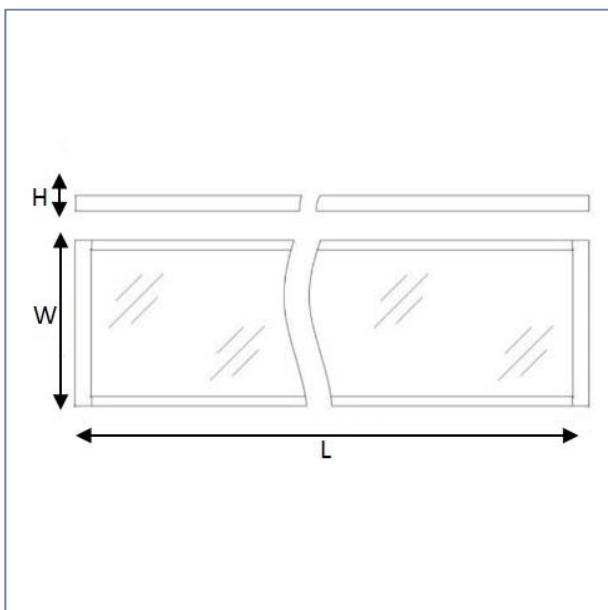

## PHOTOMETRIC CURVE

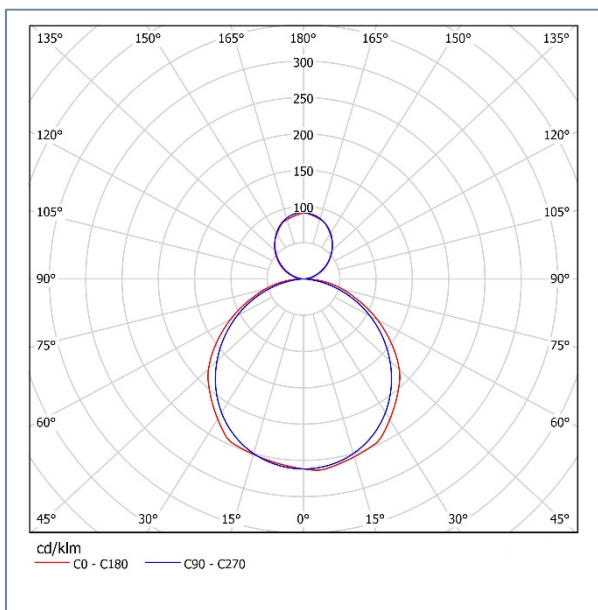

230 V  
50 Hz

