

# DNA


DNA.R3.D.O.35.840.H.WH



## SPECIFICATION TEXT

RECESSED DNA IP54, DIRECT LIGHT DISTRIBUTION, OPAL PMMA DIFFUSING OPTIC, LED LIGHT SOURCE, 4000(K) CCT, HF ELECTRONIC DRIVER, SHEET STEEL HOUSING & FRAME FINISHED WHITE. DIMENSIONS: 1195 X 297 X 110MM (TO SUIT STANDARD EXPOSED T CEILING GRID)


## PRODUCT IMAGE

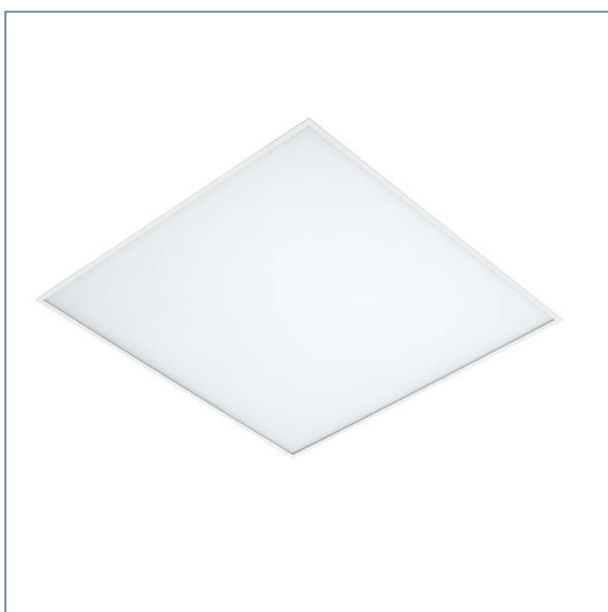

## TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Opal PMMA
- Nett luminous flux of luminaire: 3700 lm
- Luminaire efficacy: >105 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 35W
- Driver: HF electronic
- Ingress Protection: IP54
- Emergency:
- Options:

## DIMENSIONAL DETAIL

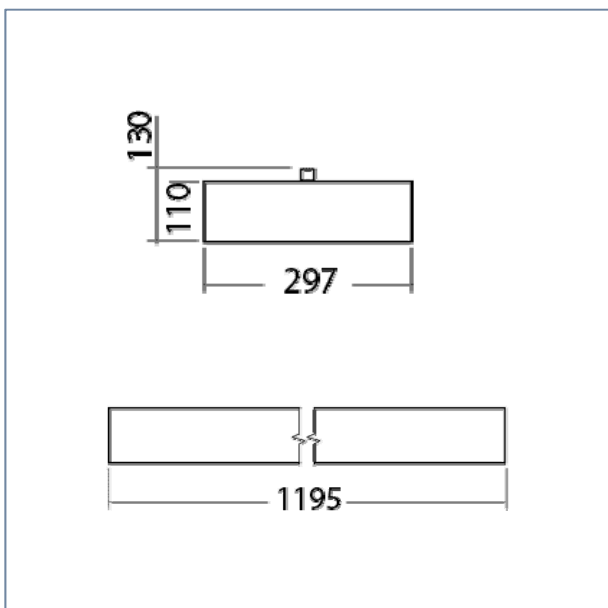

## PHOTOMETRIC CURVE

