

# PLUS+

PLK.S.T.D.43.840.H.WH



## SPECIFICATION TEXT

SUSPENDED PLUS + SHORT, TRIZONAL LIGHT DISTRIBUTION, MICROPRISMATIC DIFFUSING OPTIC, LED LIGHT SOURCE, 4000K CCT, HF LED DRIVER. SHEET STEEL FORMED HOUSING FINISHED WHITE. DIMENSIONS: (LXWXH) 1240 X 200 X 36MM

## PRODUCT IMAGE




## TECHNICAL DETAILS


- Light Distribution: Direct / Indirect
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Microprismatic
- Nett luminous flux of luminaire: 5300 lm
- Luminaire efficacy: >123lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 43W
- Driver: HF electronic
- Ingress Protection: IP40
- Emergency: 3hr available
- Options:

:

## DIMENSIONAL DETAIL

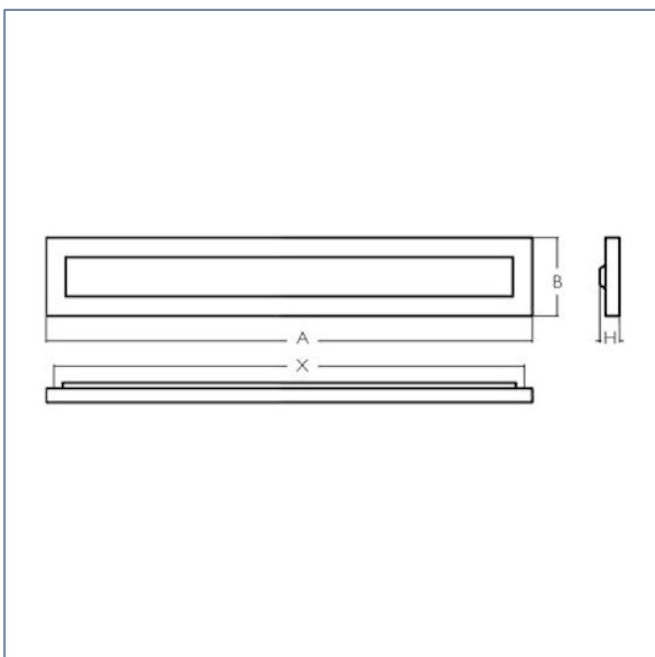

## PHOTOMETRIC CURVE

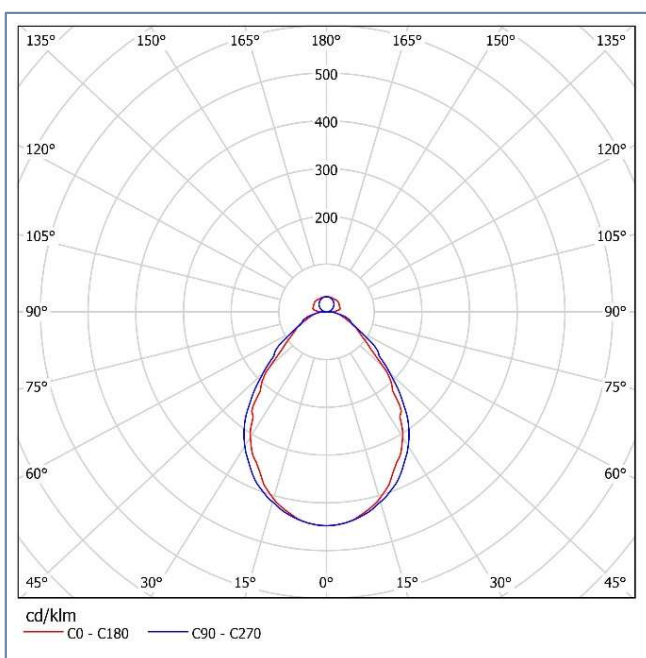

230 V  
50 Hz

