

PLUS+

PLS.S.T.D.41.8T.TW.WH



SPECIFICATION TEXT

SUSPENDED PLUS +, DIRECT / INDIRECT LIGHT DISTRIBUTION, MICROPRISMATIC DIFFUSING OPTIC, LED LIGHT SOURCE, TUNABLE WHITE 3000-6000K CCT, 2 CIRCUIT DRIVER. SHEET STEEL FORMED HOUSING FINISHED WHITE. DIMENSIONS: (LXWXH) 1490 X 200 X 36MM


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Direct / Indirect
- Light Source: LED
- Colour Temperature: 3000 - 6000K
- Optic: Microprismatic
- Nett luminous flux of luminaire: 4100 lm
- Luminaire efficacy: >100 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 41W
- Driver: Tunable 2 circuit
- Ingress Protection: IP40
- Emergency: 3hr available
- Options:

DIMENSIONAL DETAIL

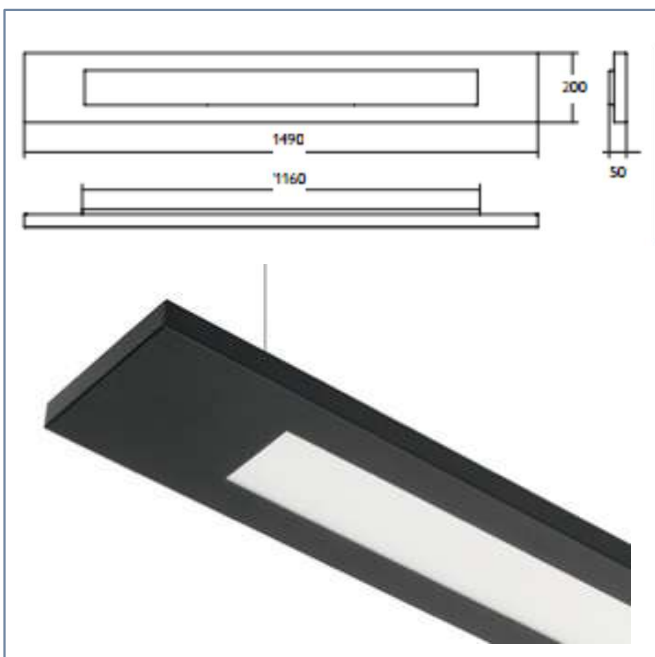

PHOTOMETRIC CURVE

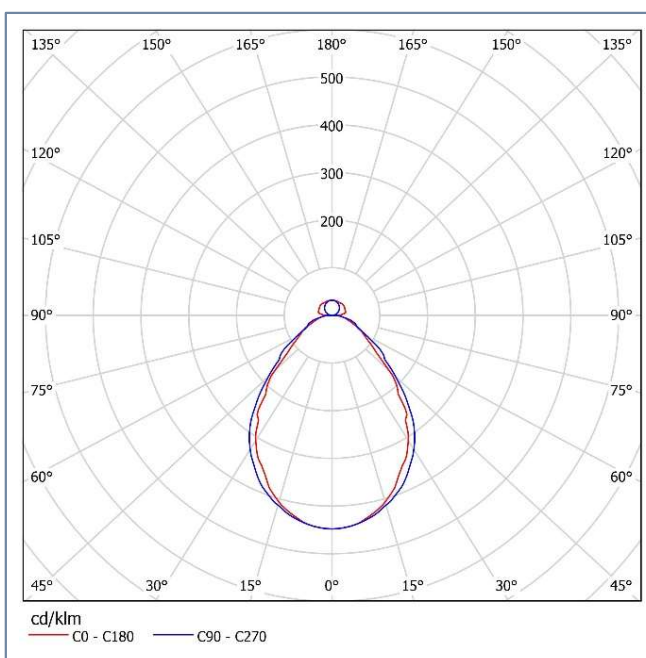

230 V
50 Hz

