

PLUS+

PLS.S.T.D.43.830.DALI.WH



SPECIFICATION TEXT

SUSPENDED PLUS +, DIRECT / INDIRECT LIGHT DISTRIBUTION, MICROPRISMATIC DIFFUSING OPTIC, LED LIGHT SOURCE, 3000K CCT, DALI LED DRIVER. SHEET STEEL FORMED HOUSING FINISHED WHITE. DIMENSIONS: (LXWXH) 1490 X 200 X 36MM


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Direct / Indirect
- Light Source: LED
- Colour Temperature: 3000K
- Optic: Microprismatic
- Nett luminous flux of luminaire: 5300 lm
- Luminaire efficacy: >123 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 43W
- Driver: DALI
- Ingress Protection: IP40
- Emergency: 3hr available
- Options: HF

DIMENSIONAL DETAIL

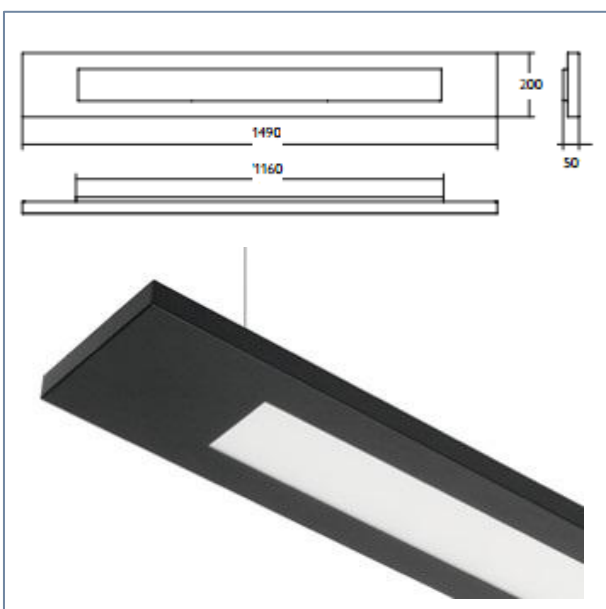

PHOTOMETRIC CURVE

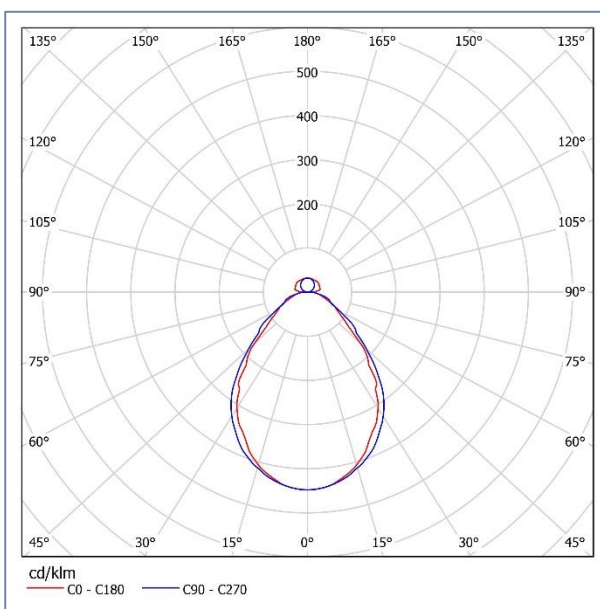

230 V
50 Hz

