

# QUO 204

QUO204.R.D.P.19.840.H.WH.54TR



## SPECIFICATION TEXT

QUO204, RECESSED DOWNLIGHT, DIRECT LIGHT DISTRIBUTION, POLISHED REFLECTOR OPTIC & IP54 TRANSPARENT COVER, LED SOURCE, 4000(K) CCT, HF ELECTRONIC DRIVER, ALUMINIUM HOUSING & FITTING TRIM FINISHED WHITE. DIMENSIONS: (ØxH) 216 X 119MM CUTOUT Ø204MM


## PRODUCT IMAGE




## TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Polished reflector & Transparent cover
- Nett luminous flux of luminaire: 1900 lm
- Luminaire efficacy: >100 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 19W
- Driver: HF electronic
- Ingress Protection: IP54
- Emergency: Remote 3hr available
- Options:

## DIMENSIONAL DETAIL

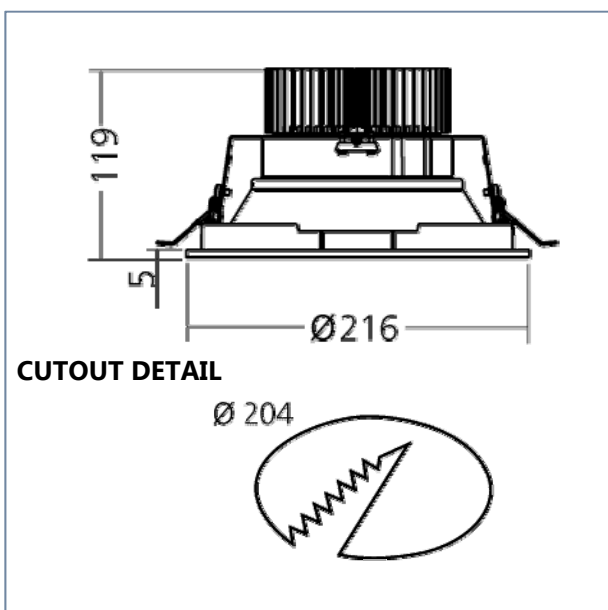

## PHOTOMETRIC CURVE

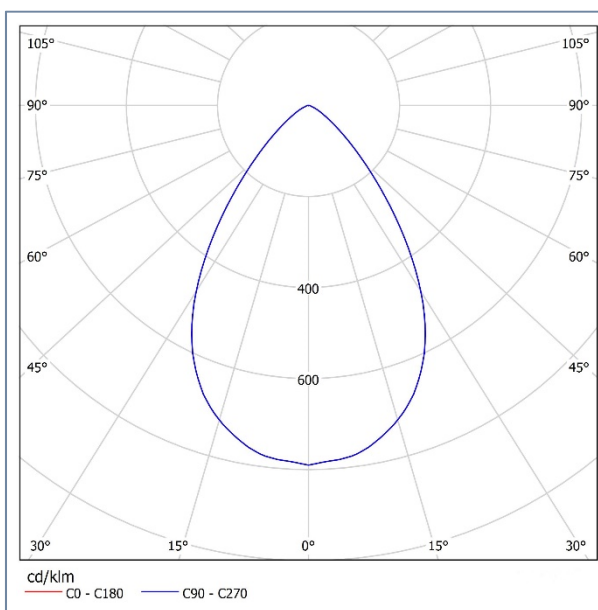

230 V  
50 Hz



CE