

# QUO 254

QUO254.R.D.P.33.840.H.WH.54TR



## SPECIFICATION TEXT

QUO254, RECESSED DOWNLIGHT, DIRECT LIGHT DISTRIBUTION, POLISHED REFLECTOR OPTIC & IP54 TRANSPARENT COVER, LED SOURCE, 4000(K) CCT, HF ELECTRONIC DRIVER, ALUMINIUM HOUSING & FITTING TRIM FINISHED WHITE. DIMENSIONS: (ØxH) 266 X 140MM CUTOUT Ø254MM

## PRODUCT IMAGE




## TECHNICAL DETAILS


- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Polished reflector & Transparent cover
- Nett luminous flux of luminaire: 3300 lm
- Luminaire efficacy: >100 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 33W
- Driver: HF electronic
- Ingress Protection: IP54
- Emergency: Remote 3hr available
- Options:

:

## DIMENSIONAL DETAIL

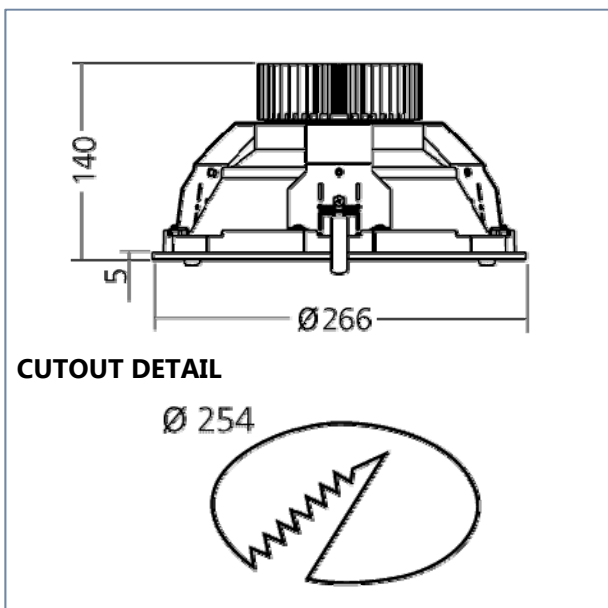

## PHOTOMETRIC CURVE

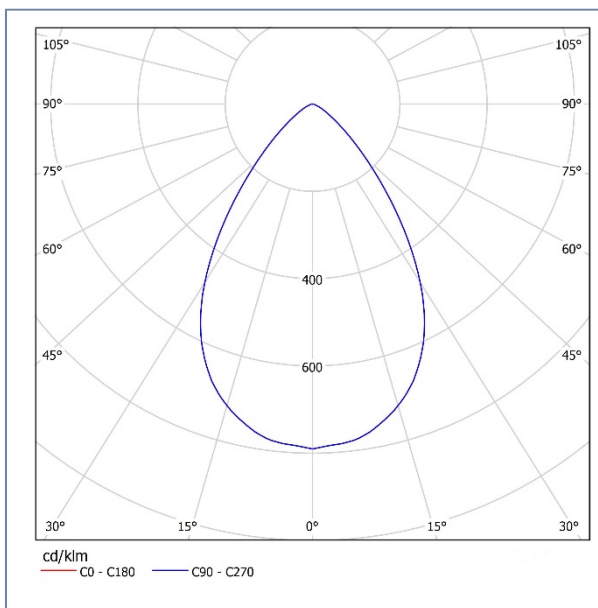

230 V  
50 Hz

