

# QUO IP6

QUOIP6.R.D.W.19.840.H.WH.65TG



## SPECIFICATION TEXT

QUOIP6, RECESSED DOWNLIGHT, DIRECT LIGHT DISTRIBUTION, WHITE REFLECTOR OPTIC & IP65 TRANSPARENT GLASS COVER, LED SOURCE, 4000(K) CCT, HF ELECTRONIC DRIVER, ALUMINIUM HOUSING & FITTING TRIM FINISHED WHITE. DIMENSIONS: (ØxH) 251 X 101MM CUTOUT Ø232MM


## PRODUCT IMAGE




## TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 4000K
- Optic: White reflector & Transparent Glass cover
- Nett luminous flux of luminaire: 2000 lm
- Luminaire efficacy: >105 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 19W
- Driver: HF electronic
- Ingress Protection: IP65
- Emergency: Remote 3hr available
- Options:

## DIMENSIONAL DETAIL

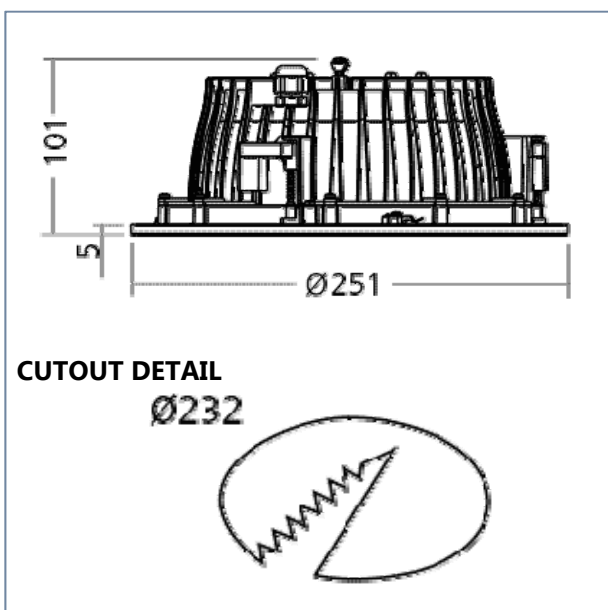

## PHOTOMETRIC CURVE

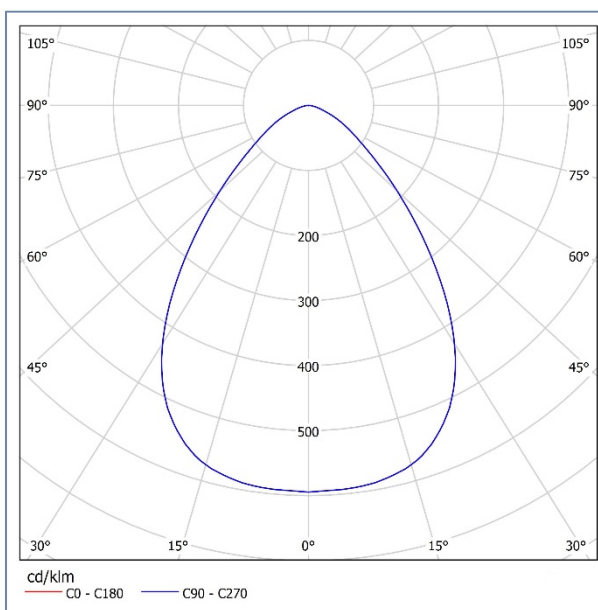

230 V  
50 Hz

