

QUADRANT


QTD.R.D.D.23.840.H.WH.1196296



SPECIFICATION TEXT

RECESSED QUADRANT, DIRECT LIGHT DISTRIBUTION. LED LIGHT SOURCE, 4000(K) CCT, HF ELECTRONIC DRIVER, MICROPRISMATIC PMMA LAMBENT OPTIC. HOUSING FINISHED WHITE. DIMENSIONS: 1196 X 296 X 60MM (TO SUIT EXPOSED T CEILING GRID)


PRODUCT IMAGE

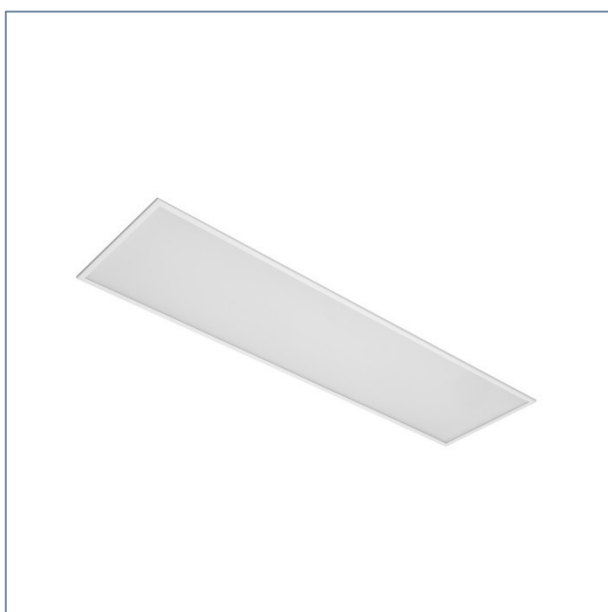


TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Microprismatic Lambent
- Nett luminous flux of luminaire: 3000 lm
- Luminaire efficacy: >130lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 23W
- Driver: HF electronic
- Ingress Protection: IP40
- Emergency: 3hr standard, DALI addressable
- Options: Other ceiling systems, Air handling

DIMENSIONAL DETAIL

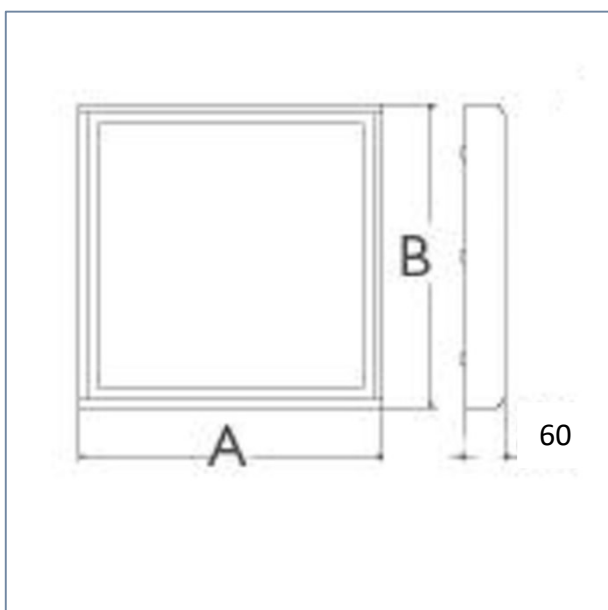

PHOTOMETRIC CURVE

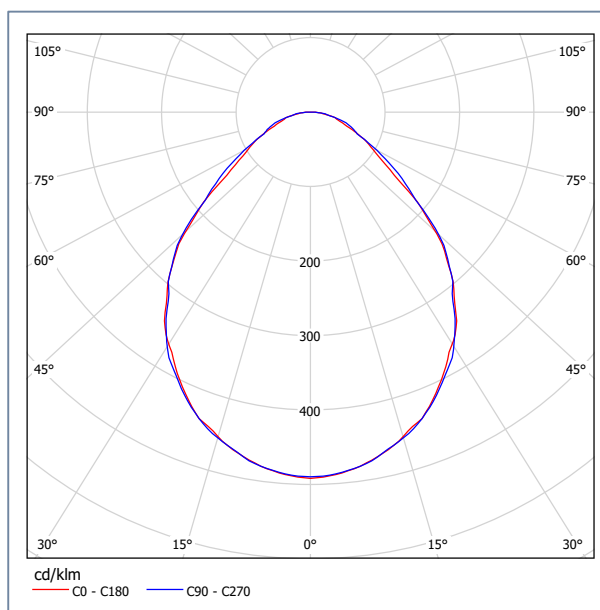

IP20

230 V
50 Hz

