

ROUTE

ROU.C.D.T.3.850.H.G



SPECIFICATION TEXT

Surface mounted Route LED, Direct light distribution. Transparent polycarbonate optic, LED light source, 5000(K) CCT, HF electronic driver, Polycarbonate body finished grey. Dimensions: (LxWxH) 350 x 120 x 90 mm

PRODUCT IMAGE




TECHNICAL DETAILS


- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 5000K
- Optic: Transparent Polycarbonate
- Nett luminous flux of luminaire: 153 lm
- Luminaire efficacy: >54 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 2.8W
- Driver: HF electronic
- Ingress Protection: IP65
- Emergency: Maintained or Non-Maintained
- Options: Legend Kit

Mounting height Hm (m)	Trans. to wall	Trans. to trans.	Axial to trans.	Axial to axial	Axial to wall	
2.5	1.6	5.9	4.3	3.0	1.0	1 Lux min. at centre
4.0	1.1	4.7	3.6	2.6	0.4	
2.5	2.6	9.7	7.2	4.7	1.2	0.5 Lux min. (open)
4.0	1.9	8.5	7.0	4.5	0.6	

DIMENSIONAL DETAIL

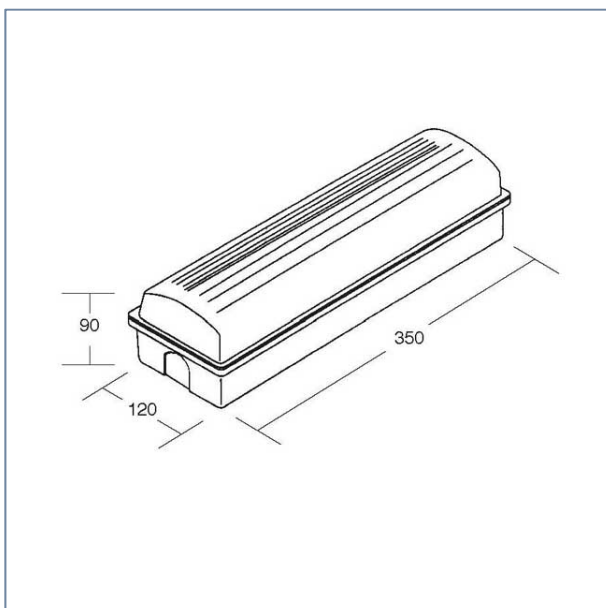

PHOTOMETRIC CURVE

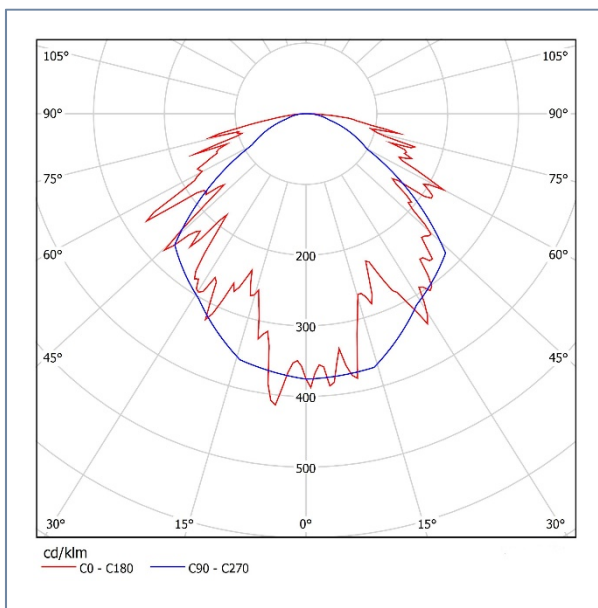

230 V
50 Hz



CE