

# SCULPT B

SCUB.RR.A36.F5.840.DALI.WH



## SPECIFICATION TEXT

RECESSED ROUND SCULPT, 36 DEGREE BEAM ADJUSTABLE LIGHT DISTRIBUTION, FACETTED REFLECTOR OPTIC, LED LIGHT SOURCE, 4000K CCT, DALI DRIVER. ALUMINIUM HOUSING FINISHED WHITE. DIMENSIONS: (ØXH) 80 X 30MM CUT OUT Ø70MM


## PRODUCT IMAGE



## TECHNICAL DETAILS

- Light Distribution: Adjustable 36 degree beam
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Facetted
- Nett luminous flux of luminaire: 530 lm
- Luminaire efficacy: >106 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 5W
- Driver: DALI
- Ingress Protection: IP65
- Emergency:
- Options: HF

## DIMENSIONAL DETAIL

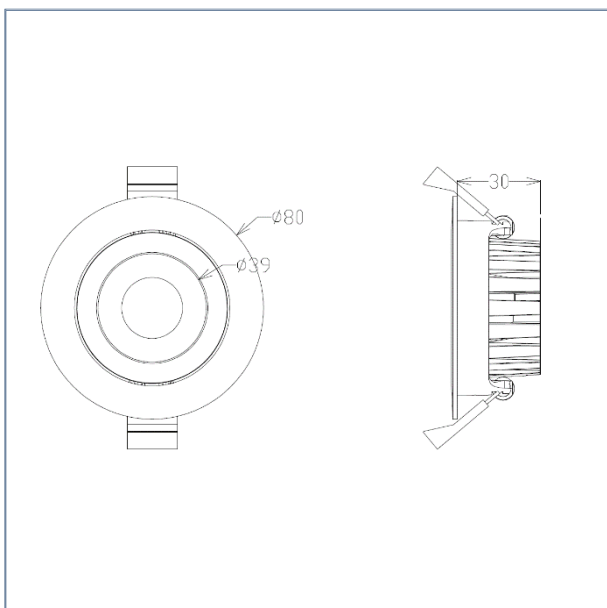

## PHOTOMETRIC CURVE



230 V  
50 Hz

