

SCULPT B

SCUB.RS.A36.F13.840.DALI.WH



SPECIFICATION TEXT

RECESSED SQUARE SCULPT, 36 DEGREE BEAM ADJUSTABLE LIGHT DISTRIBUTION, FACETTED REFLECTOR OPTIC, LED LIGHT SOURCE, 4000K CCT, DALI DRIVER. ALUMINIUM HOUSING FINISHED WHITE. DIMENSIONS: (LXWXH) 110 X 110 X 50MM CUT OUT Ø90MM


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Adjustable 36 degree beam
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Facetted
- Nett luminous flux of luminaire: 1350 lm
- Luminaire efficacy: >103 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 13W
- Driver: DALI
- Ingress Protection: IP65
- Emergency:
- Options: HF

DIMENSIONAL DETAIL

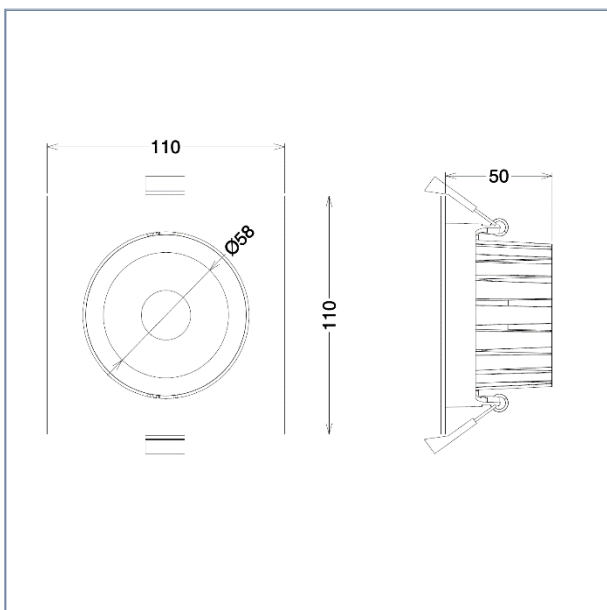

PHOTOMETRIC CURVE

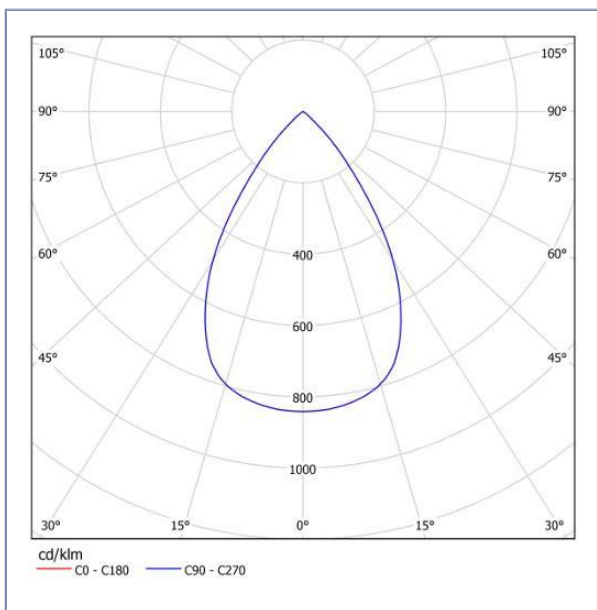

230 V
50 Hz

