

SCULPT B

SCUB.RS.A60.F.8.840.DALI.WH



SPECIFICATION TEXT

RECESSED SQUARE SCULPT, 60 DEGREE BEAM ADJUSTABLE LIGHT DISTRIBUTION, FACETTED REFLECTOR OPTIC, LED LIGHT SOURCE, 4000K CCT, DALI DRIVER. ALUMINIUM HOUSING FINISHED WHITE. DIMENSIONS: (LXWXH) 80 X 80 X 30MM CUT OUT Ø70MM


PRODUCT IMAGE



TECHNICAL DETAILS

- Light Distribution: Adjustable 60 degree beam
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Facetted
- Nett luminous flux of luminaire: 815 lm
- Luminaire efficacy: >101 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 8W
- Driver: DALI
- Ingress Protection: IP65
- Emergency:
- Options: HF

DIMENSIONAL DETAIL

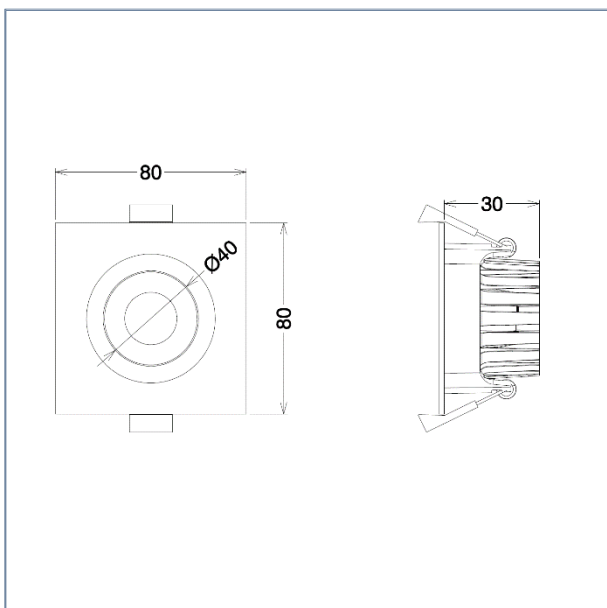

PHOTOMETRIC CURVE



230 V
50 Hz

