

# SCULPT C

SCC160.RR.D60.F.35.840.DALI.WH



## SPECIFICATION TEXT

RECESSED ROUND SCULPT, 60 DEGREE BEAM DIRECT LIGHT DISTRIBUTION, FACETTED REFLECTOR OPTIC, LED LIGHT SOURCE, 4000K CCT, DALI DRIVER. ALUMINIUM HOUSING FINISHED WHITE. DIMENSIONS: (ØXH) 190 X 75MM CUT OUT Ø 160MM


## PRODUCT IMAGE




## TECHNICAL DETAILS

- Light Distribution: Direct 60 degree beam
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Facetted
- Nett luminous flux of luminaire: 3995 lm
- Luminaire efficacy: >113 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 35W
- Driver: DALI
- Ingress Protection: IP20 / IP44
- Emergency:
- Options: HF

## DIMENSIONAL DETAIL

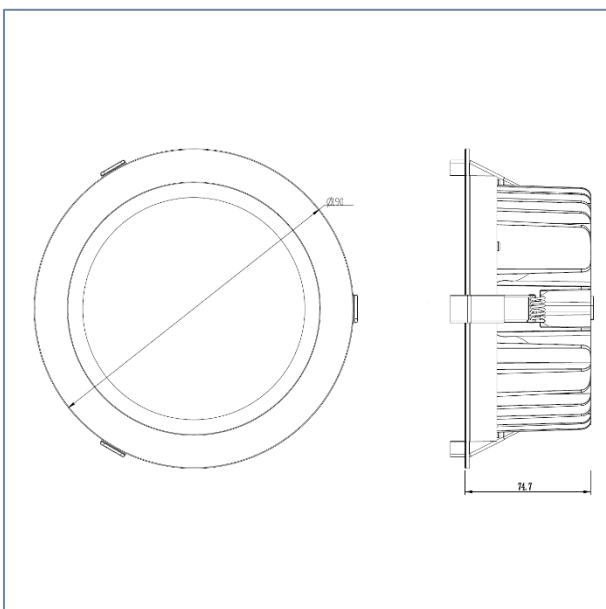

## PHOTOMETRIC CURVE

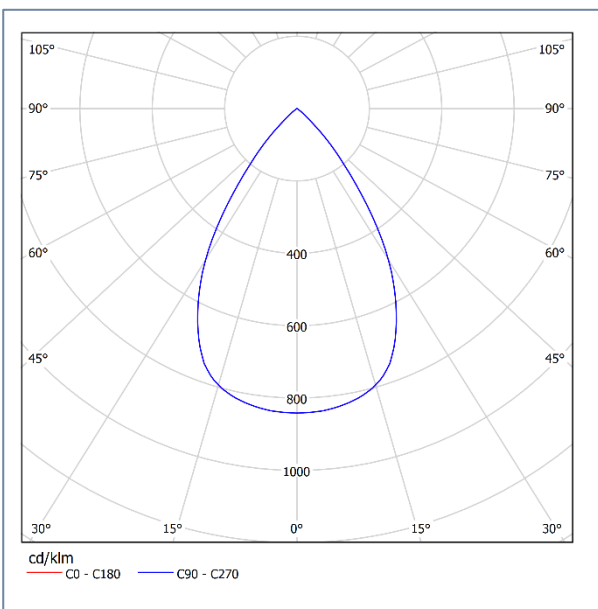

230 V  
50 Hz

