

# SCULPT G

SCG160.RR.A60.F.18.830.H.WH



## SPECIFICATION TEXT

RECESSED ROUND SCULPT, 60 DEGREE BEAM ADJUSTABLE LIGHT DISTRIBUTION, FACETTED REFLECTOR OPTIC, LED LIGHT SOURCE, 3000K CCT, HF LED DRIVER. ALUMINIUM HOUSING FINISHED WHITE. DIMENSIONS: (ØXH) 180 X 100MM CUT OUT Ø160MM


## PRODUCT IMAGE




## TECHNICAL DETAILS

- Light Distribution: Adjustable 60 degree beam
- Light Source: LED
- Colour Temperature: 3000K
- Optic: Facetted
- Nett luminous flux of luminaire: 1274 lm
- Luminaire efficacy: >70 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 18W
- Driver: HF electronic
- Ingress Protection: IP20
- Emergency:
- Options:

## DIMENSIONAL DETAIL

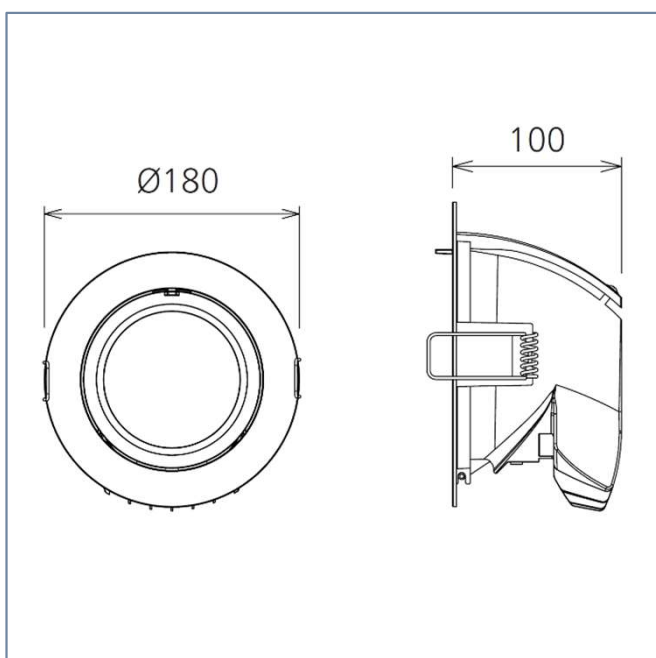

## PHOTOMETRIC CURVE

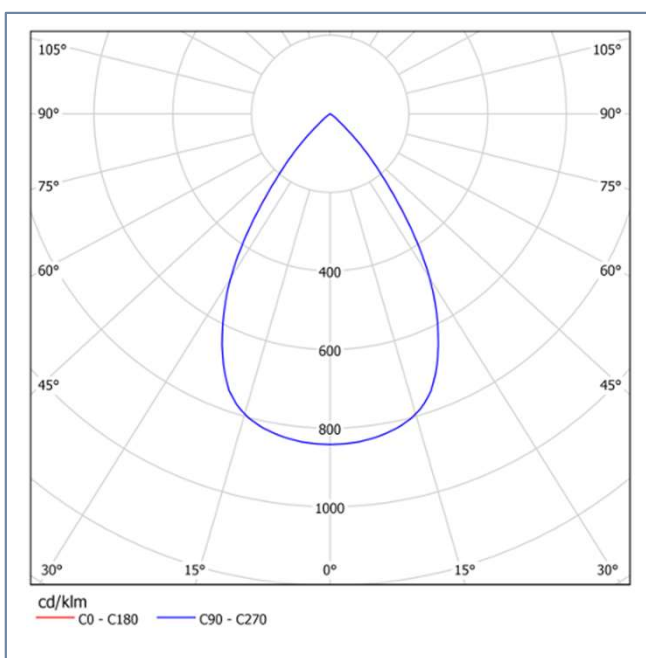

230 V  
50 Hz

