

SPHERE P

SPP.S1.T.O.29.840.H.WH



SPECIFICATION TEXT

SUSPENDED SPHERE, DIRECT/INDIRECT LIGHT DISTRIBUTION, OPAL POLYCARBONATE GLOBE OPTIC, LED LIGHT SOURCE, 4000(K) CCT, HF ELECTRONIC DRIVER, WHITE CEILING BEZEL WITH 2MTR WIRE SUSPENSION.
DIMENSIONS: OUTER Ø400 MM


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Opal Polycarbonate
- Nett luminous flux of luminaire: 3620 lm
- Luminaire efficacy: >124 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 29W
- Driver: HF electronic
- Ingress Protection: IP40
- Emergency: N/A
- Options:

DIMENSIONAL DETAIL

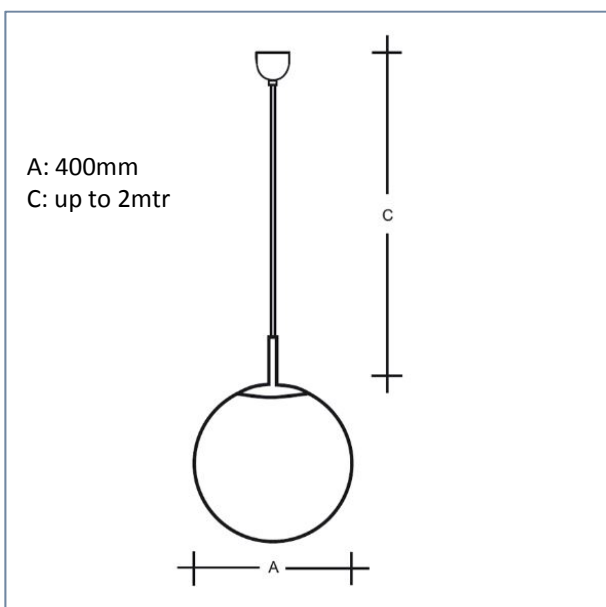

PHOTOMETRIC CURVE

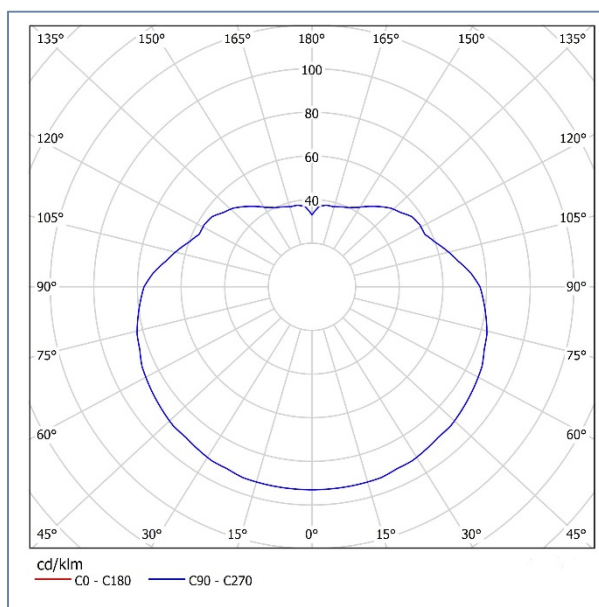

230 V
50 Hz

