

# SPHERE G

SPG.S1.T.O.20.830.H.WH



## SPECIFICATION TEXT

SUSPENDED SPHERE, DIRECT/INDIRECT LIGHT DISTRIBUTION, OPAL GLASS GLOBE OPTIC, LED LIGHT SOURCE, 3000(K) CCT, HF ELECTRONIC DRIVER, WHITE CEILING BEZEL WITH 1MTR WIRE SUSPENSION. DIMENSIONS: OUTER Ø300 MM


## PRODUCT IMAGE




## TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 3000K
- Optic: Opal Glass
- Nett luminous flux of luminaire: 2960 lm
- Luminaire efficacy: >148 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 20W
- Driver: HF electronic
- Ingress Protection: IP40
- Emergency: N/A
- Options: Sensor, DALI

## DIMENSIONAL DETAIL

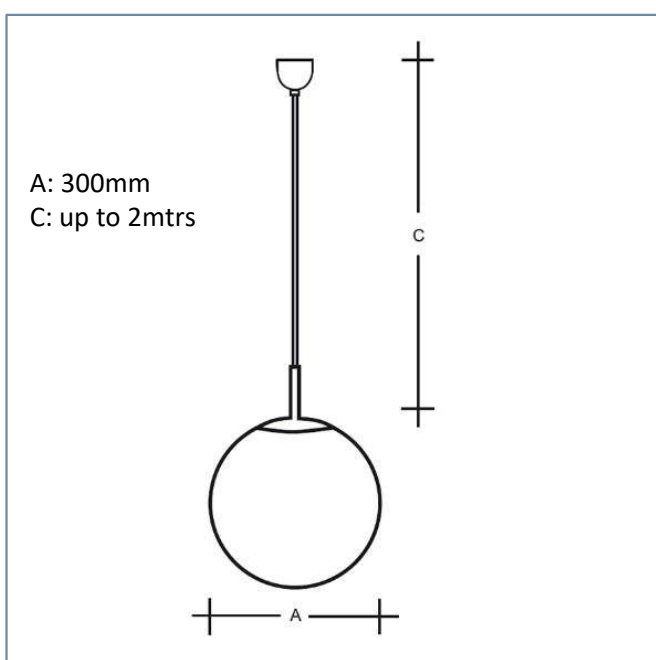

## PHOTOMETRIC CURVE

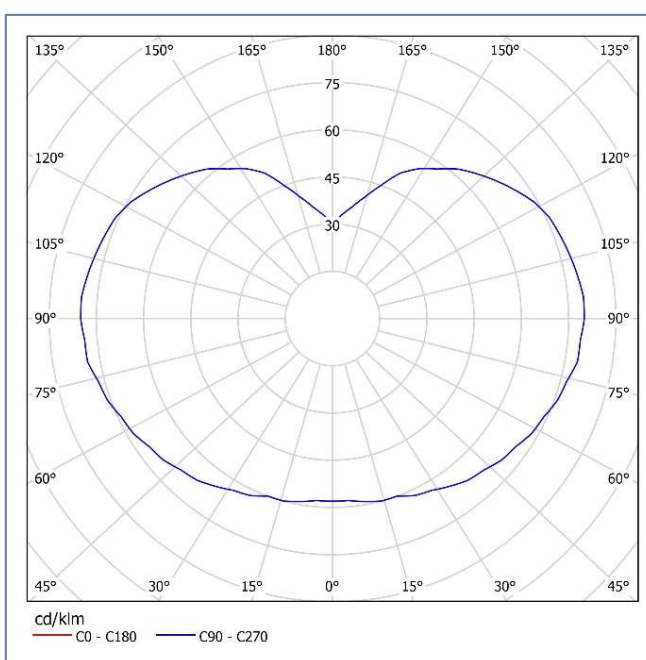

230 V  
50 Hz

