

SPHERE G

SPG.S1.T.O.27.840.H.WH



SPECIFICATION TEXT

SUSPENDED SPHERE, DIRECT/INDIRECT LIGHT DISTRIBUTION, OPAL GLASS GLOBE OPTIC, LED LIGHT SOURCE, 4000(K) CCT, HF ELECTRONIC DRIVER, WHITE CEILING BEZEL WITH 1MTR WIRE SUSPENSION. DIMENSIONS: OUTER Ø400 MM


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Opal Glass
- Nett luminous flux of luminaire: 4070 lm
- Luminaire efficacy: >150 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 27W
- Driver: HF electronic
- Ingress Protection: IP40
- Emergency: 3h Std (Also Selftest)
- Options: Sensor, DALI

DIMENSIONAL DETAIL

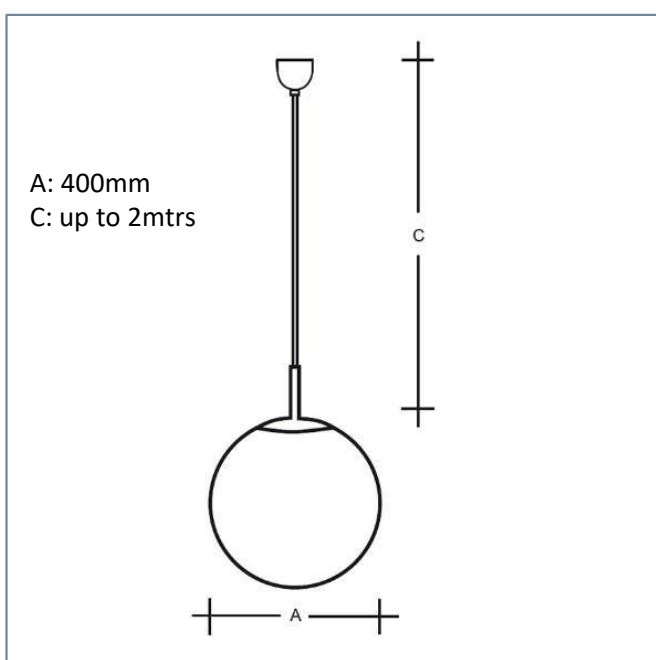

PHOTOMETRIC CURVE

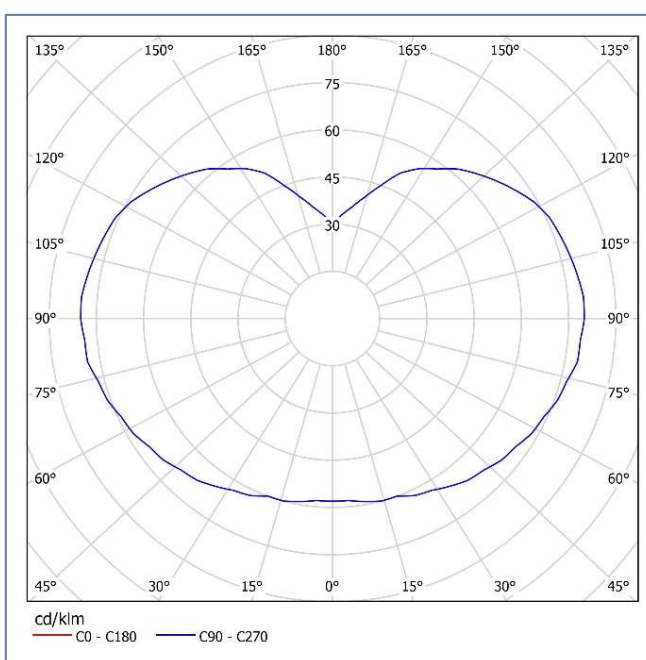

230 V
50 Hz

