

# SPHERE P

SPP.S1.T.O.41.830.H.WH



## SPECIFICATION TEXT

SUSPENDED SPHERE, DIRECT/INDIRECT LIGHT DISTRIBUTION, OPAL POLYCARBONATE GLOBE OPTIC, LED LIGHT SOURCE, 3000(K) CCT, HF ELECTRONIC DRIVER, WHITE CEILING BEZEL WITH 1MTR WIRE SUSPENSION.  
DIMENSIONS: OUTER Ø500 MM


## PRODUCT IMAGE




## TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 3000K
- Optic: Opal Polycarbonate
- Nett luminous flux of luminaire: 5870 lm
- Luminaire efficacy: >143 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 41W
- Driver: HF electronic
- Ingress Protection: IP40
- Emergency: 3h Std
- Options: DALI

## DIMENSIONAL DETAIL

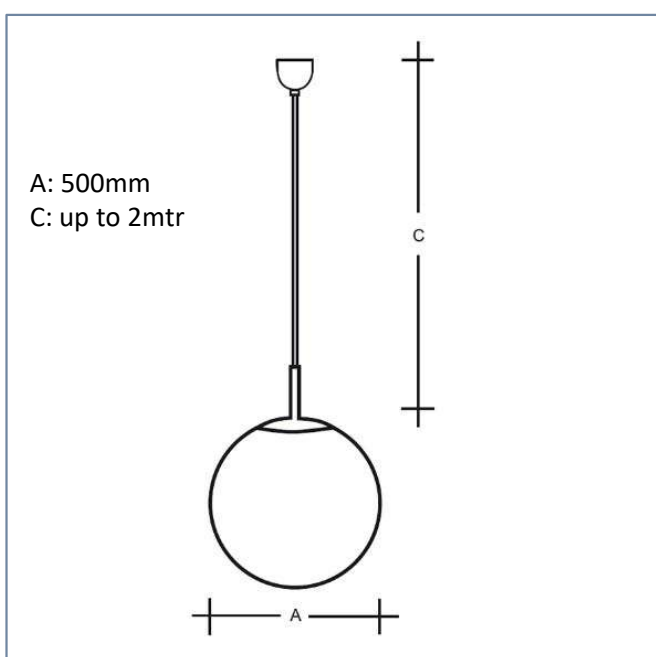

## PHOTOMETRIC CURVE

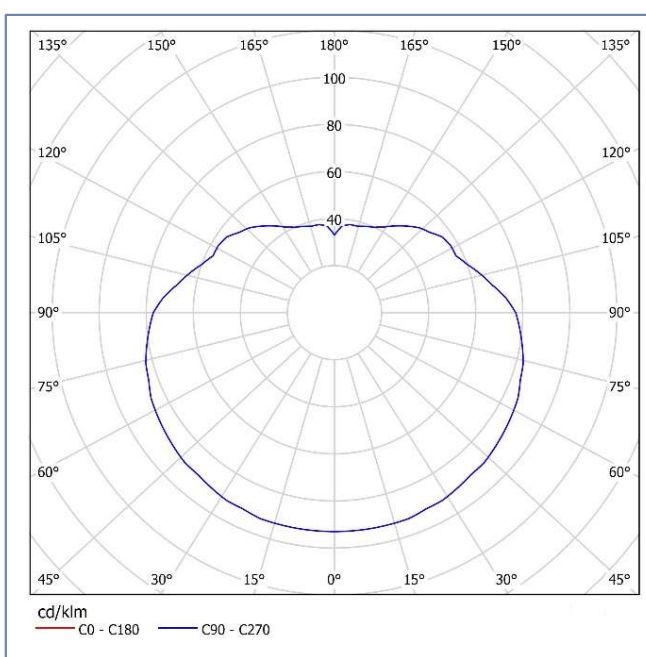

230 V  
50 Hz

