

STRIA LED

STL.R2.D.DO.27.840.H.WH



SPECIFICATION TEXT

RECESSED TRIMLESS STRIA, DIRECT LIGHT DISTRIBUTION, DROP OPAL PMMA DIFFUSING OPTIC, LED LIGHT SOURCE, 4000K CCT, HF LED DRIVER. ALUMINIUM EXTRUDED HOUSING WITH WHITE POWDER COAT FINISH. DIMENSIONS: (LXWXH) 1711X90X94MM


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Drop Opal PMMA
- Nett luminous flux of luminaire: 2951 lm
- Luminaire efficacy: >109 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 27W
- Driver: HF electronic
- Remote 3hr Emergency available
- Options:

DIMENSIONAL DETAIL

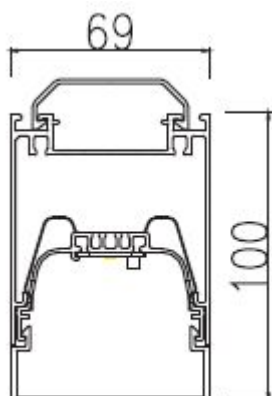

PHOTOMETRIC CURVE

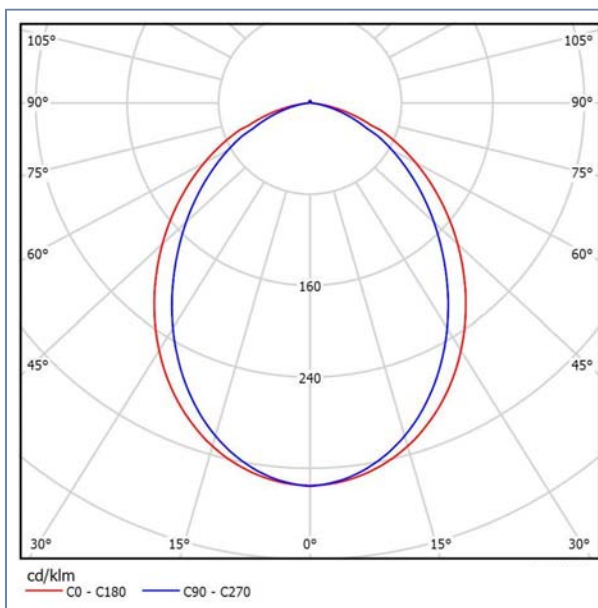

IP20 230 V 50 Hz

