

STRIA LED

STL.R2.D.FO.36.840.H.WH



SPECIFICATION TEXT

RECESSED TRIMLESS STRIA, DIRECT LIGHT DISTRIBUTION, FLAT OPAL PMMA DIFFUSING OPTIC, LED LIGHT SOURCE, 4000K CCT, HF LED DRIVER. ALUMINIUM EXTRUDED HOUSING WITH WHITE POWDER COAT FINISH. DIMENSIONS: (LXWXH) 1149X90X85MM


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Flat Opal PMMA
- Nett luminous flux of luminaire: 3450 lm
- Luminaire efficacy: >95 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 36W
- Driver: HF electronic
- Remote 3hr Emergency available
- Options:

DIMENSIONAL DETAIL

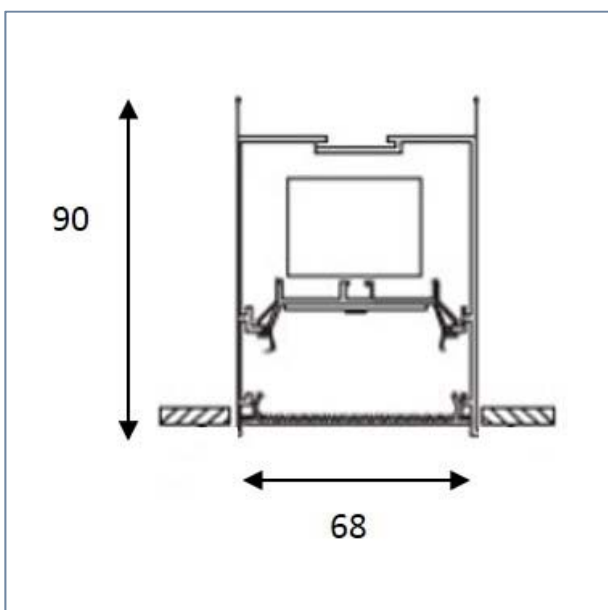

PHOTOMETRIC CURVE

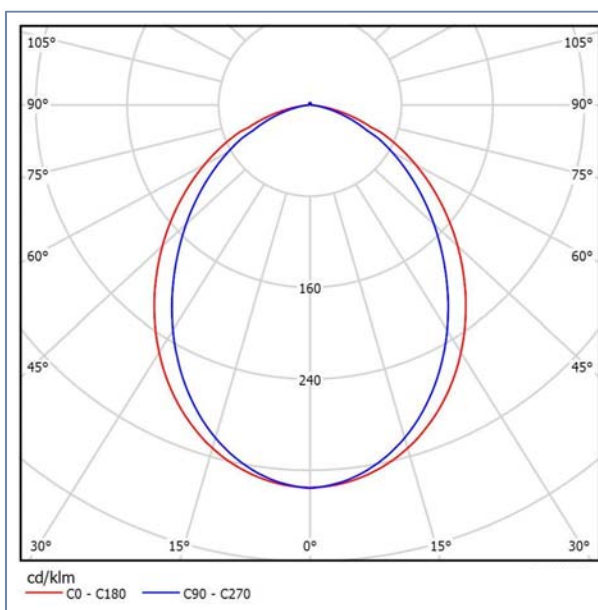

IP20 230 V 50 Hz

