

# STRIA LED


STL.R2.D.FO.18.840.H.WH



## SPECIFICATION TEXT

RECESSED TRIMLESS STRIA, DIRECT LIGHT DISTRIBUTION, FLAT OPAL PMMA DIFFUSING OPTIC, LED LIGHT SOURCE, 4000K CCT, HF LED DRIVER. ALUMINIUM EXTRUDED HOUSING WITH WHITE POWDER COAT FINISH. DIMENSIONS: (LXWXH) 1149X90X85MM


## PRODUCT IMAGE

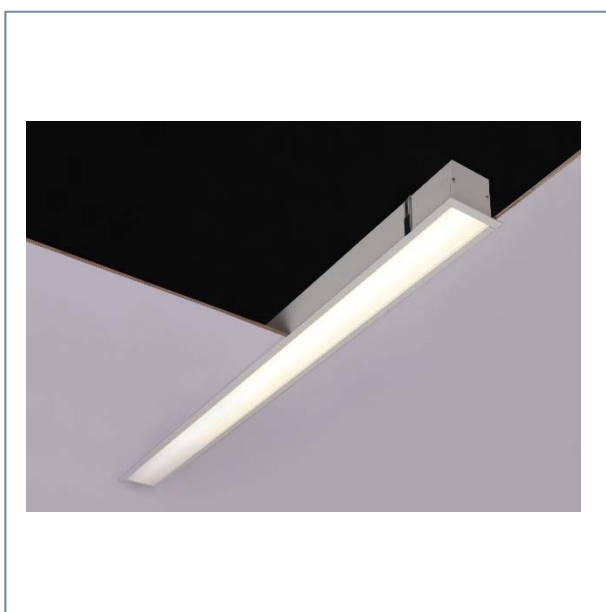


## TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Flat Opal PMMA
- Nett luminous flux of luminaire: 1647 lm
- Luminaire efficacy: >91 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 18W
- Driver: HF electronic
- Remote 3hr Emergency available
- Options:

## DIMENSIONAL DETAIL

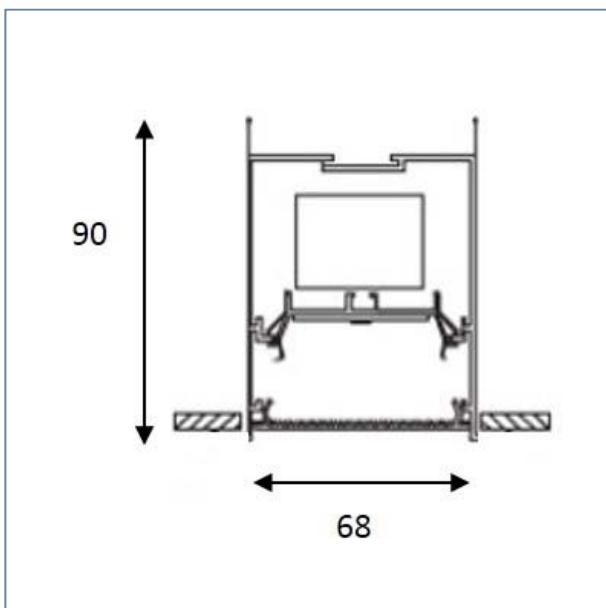

## PHOTOMETRIC CURVE

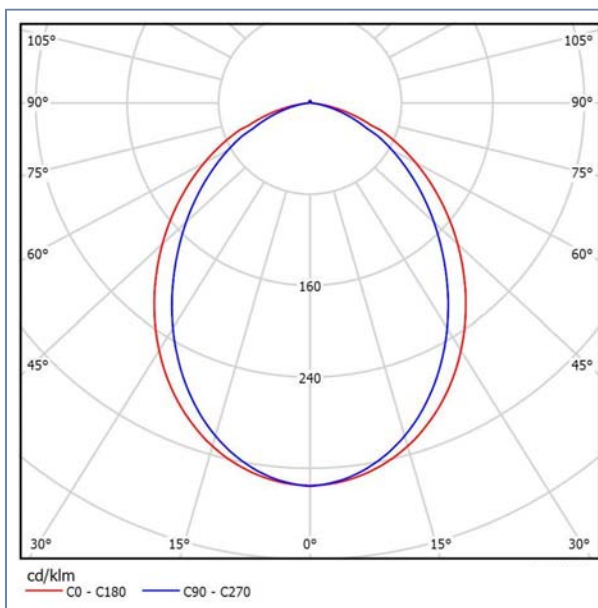

IP20 230 V 50 Hz

