

VEIN IV

VE4.S.T.XO.54.840.H.WH



SPECIFICATION TEXT

Suspended Vein IV, Direct Indirect light distribution. Extra Drop Opal PMMA optic, LED light source, 4000(K) CCT, HF electronic driver, Aluminium extruded housing, finished in White. Dimensions : LxWxH 1690x43x110mm


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Direct / Indirect
- Light Source: LED
- Total luminous flux of luminaire: 4050 lm
- Luminaire efficacy: 75lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 54W
- Driver: HF as standard (DALI on request)
- Emergency 3hr available

DIMENSIONAL DETAIL

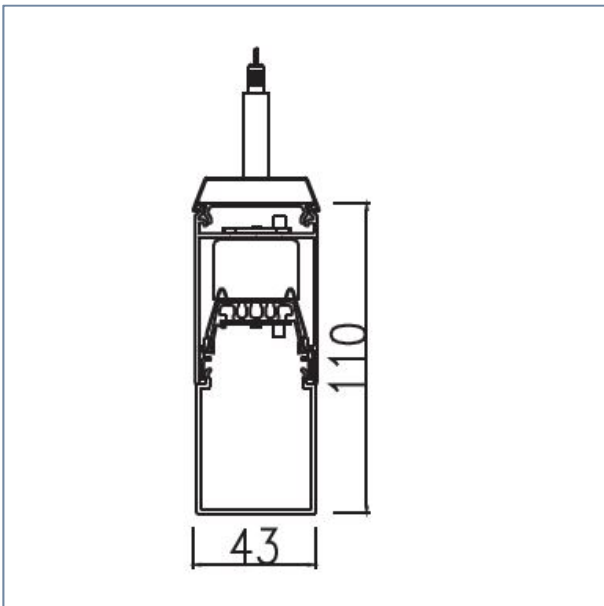

PHOTOMETRIC CURVE

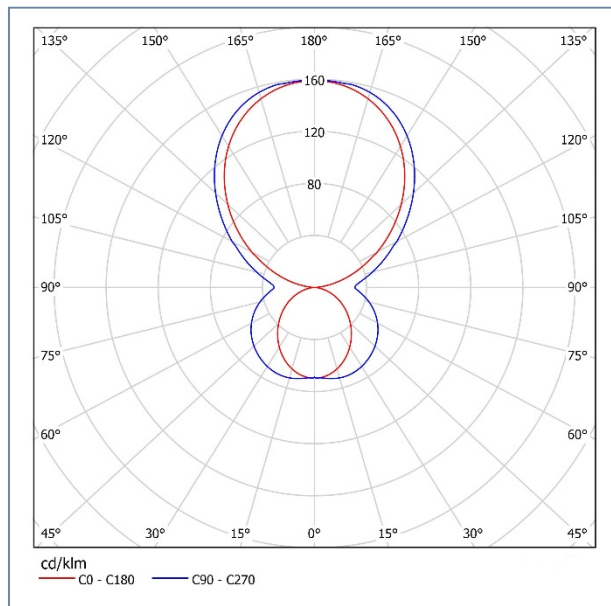

IP20 230 V 50 Hz

