

WHO FLAT

WHF.S.T.Tr.40.840.H.WH



SPECIFICATION TEXT

SUSPENDED WHO FLAT, DIRECT / INDIRECT LIGHT DISTRIBUTION, TRANSFORMATIVE CLEAR / OPAL OPTIC, LED LIGHT SOURCE, 4000K CCT, REMOTE MOUNTED HF LED DRIVER. ALUMINIUM HOUSING FINISHED WHITE.
DIMENSIONS: (ØXH) Ø580 X 15MM


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Trizonal
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Transformative clear / opal
- Nett luminous flux of luminaire: 3400 lm
- Luminaire efficacy: >85 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 40W
- Driver: Remote mounted HF electronic
- Ingress Protection: IP40
- Emergency:
- Options:

DIMENSIONAL DETAIL

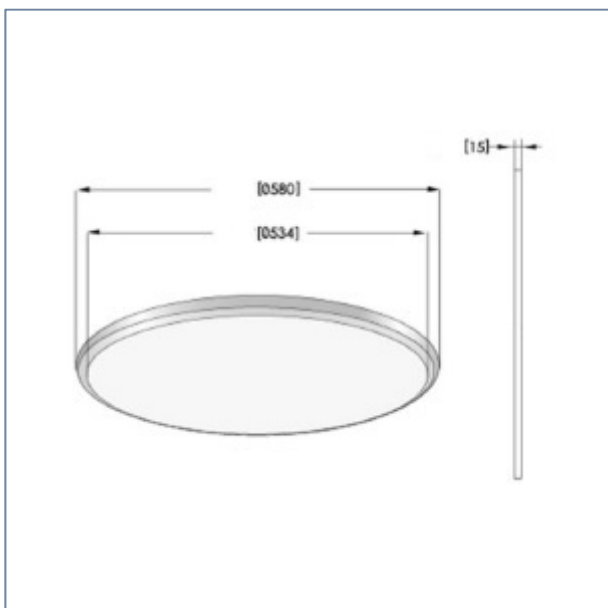

PHOTOMETRIC CURVE

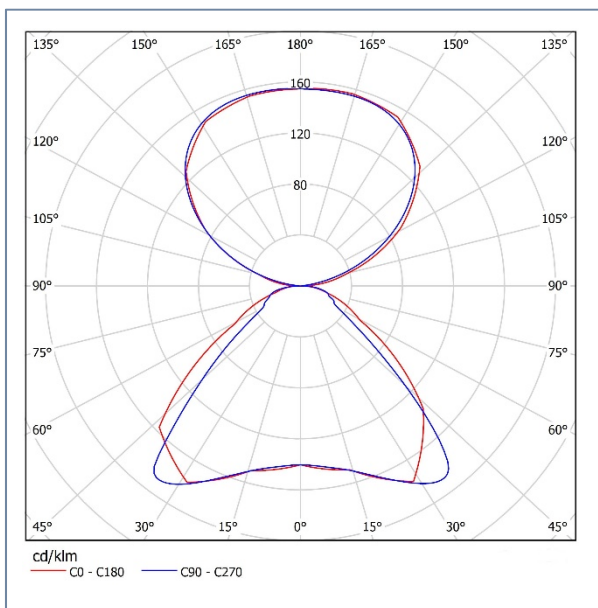

230 V
50 Hz

