

# BEARING IV

BE4.R80.D.ER.3.DALI.NM3.WH



## SPECIFICATION TEXT

RECESSED MOUNTED BEARING IV, LENS FOR ECASPE ROUTE DISTRIBUTION IN ACCORDANCE WITH EN1838, LED LIGHT SOURCE, DALI NON-MAINTAINED, BATTERY TO GIVE FULL OPERATION IN THE EVENT OF MAINS FAILURE FOR 3 HOURS, POLYCARBONATE HOUSING IN WHITE. DIMENSIONS: Ø 80 X 32MM CUT OUT 45MM.


## PRODUCT IMAGE




## TECHNICAL DETAILS

- Light Distribution: Direct, Escape Route
- Optic: Clear Polycarbonate
- Connected Load: 3.5W
- Light Source: LED
- Integral Driver: DALI
- Nett luminous flux of luminaire: 260lm
- Luminaire efficacy: >74lm/W
- Colour Temperature: 5000K
- Wiring to: Rear
- Colour Rendering Index min.: >70 Ra
- Ingress Protection: IP20
- IK Rating: IK08
- Emergency operating: 3 Hrs
- Recharge time: 24 Hrs

## DIMENSIONAL DETAIL

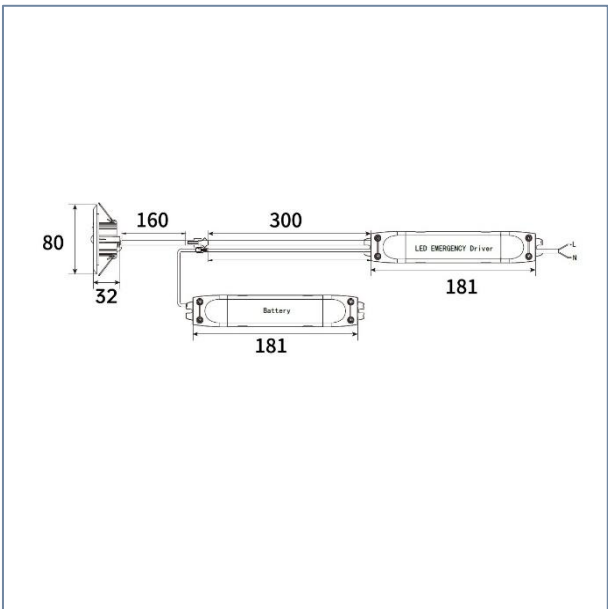

## PHOTOMETRIC CURVE

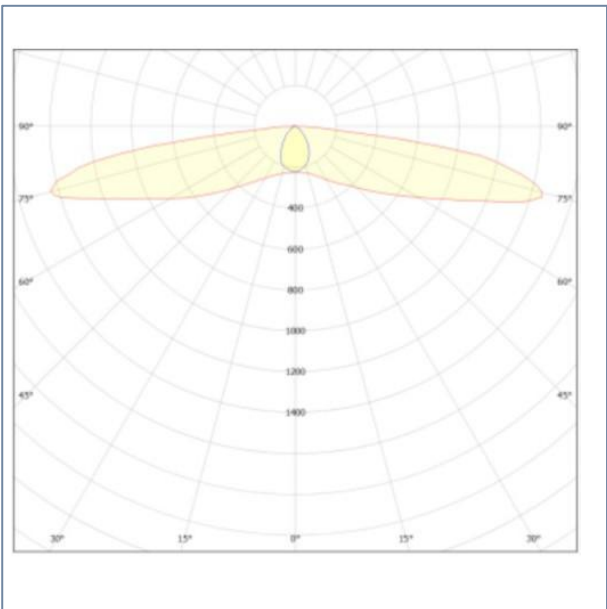

230 V  
50 Hz

