

ECHOIC 6

EC6.R3.D.O.40.8T.TW.WH



SPECIFICATION TEXT

RECESSED ECHOIC 6, DIRECT LIGHT DISTRIBUTION, ADVANCED DUAL MICROPRISMATIC & OPAL PMMA DIFFUSING OPTIC, LED LIGHT SOURCE, TUNABLE WHITE CCT, 2 CIRCUIT DRIVER. FORMED STEEL HOUSING FINISHED WHITE. DIMENSIONS : (LXWXH) 1195 X 295 X 102MM (TO SUIT EXPOSED T GRID SYSTEM)


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 3000-6000K
- Optic: Microprismatic & Opal PMMA
- Nett luminous flux of luminaire: 4100 lm
- Luminaire efficacy: >102 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 40W
- Driver: Tunable 2 circuit
- Ingress Protection: IP40
- Remote 3hr Emergency available
- Options:

DIMENSIONAL DETAIL

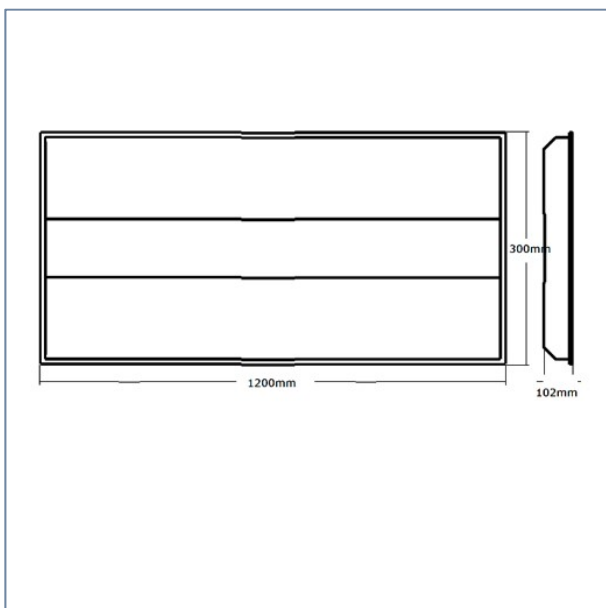

PHOTOMETRIC CURVE

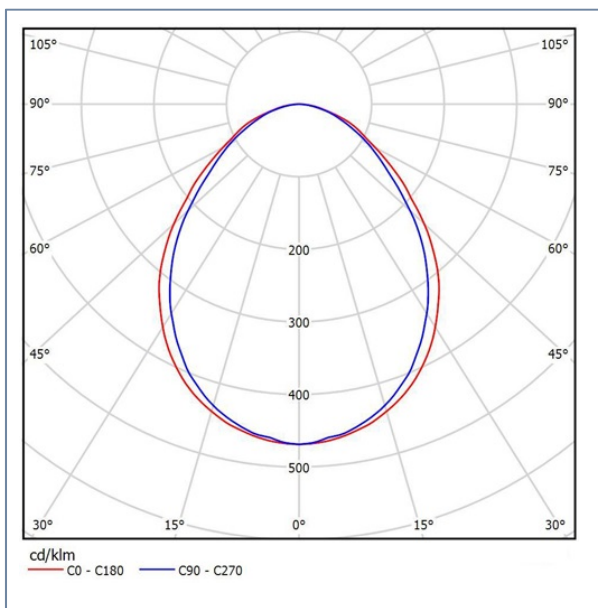

230 V
50 Hz

