

# ECHOIC 6

EC6.R1.D.O.40.8T.TW.WH



## SPECIFICATION TEXT

RECESSED ECHOIC 6, DIRECT LIGHT DISTRIBUTION, ADVANCED DUAL MICROPRISMATIC & OPAL PMMA DIFFUSING OPTIC, LED LIGHT SOURCE, TUNABLE WHITE CCT, 2 CIRCUIT DRIVER. FORMED STEEL HOUSING FINISHED WHITE. DIMENSIONS : (LXWXH) 595 X 595 X 102MM (TO SUIT EXPOSED T GRID SYSTEM))


## PRODUCT IMAGE




## TECHNICAL DETAILS

- Light Distribution: Direct
- Light Source: LED
- Colour Temperature: 3000-6000K
- Optic: Microprismatic & Opal PMMA
- Nett luminous flux of luminaire: 4100 lm
- Luminaire efficacy: >102 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 52W
- Driver: Tunable 2 circuit
- Ingress Protection: IP40
- Remote 3hr Emergency available
- Options:

## DIMENSIONAL DETAIL

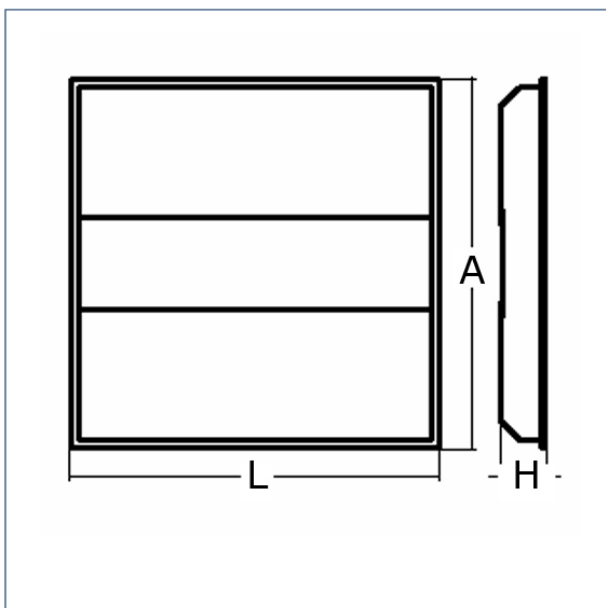

## PHOTOMETRIC CURVE

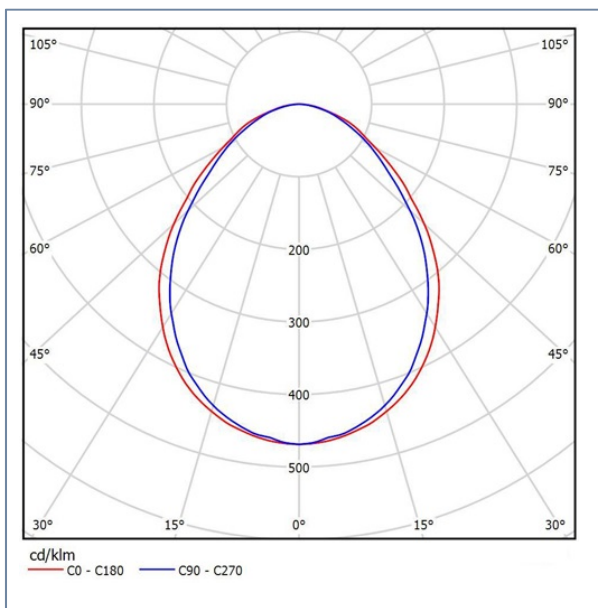

230 V  
50 Hz

