

# FENETRE III

F3S.S.T.TM.50.830.H.G



## SPECIFICATION TEXT

SUSPENDED MOUNTED FENETRE 3 SQUARE EDGE PROFILE, DIRECT INDIRECT LIGHT DISTRIBUTION (60%, 40%). TRANSFORMATIVE CLEAR /OPAL M OPTIC, LED LIGHT SOURCE, 3000(K) CCT, REMOTE HF ELECTRONIC DRIVER, EXTRUDED ALUMINIUM HOUSING FINISHED SILVER GREY. DIMENSIONS: (LXWXH) 1195 X 295 X 25 MM


## PRODUCT IMAGE




## TECHNICAL DETAILS

- Light Distribution: Direct indirect 60 / 40
- Light Source: LED
- Colour Temperature: 3000K
- Optic: Transformative M Type
- Nett luminous flux of luminaire: 5752 lm
- Luminaire efficacy: >115 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 50W
- Driver: Remote HF electronic
- Ingress Protection: IP20
- Emergency:
- Options:

## DIMENSIONAL DETAIL

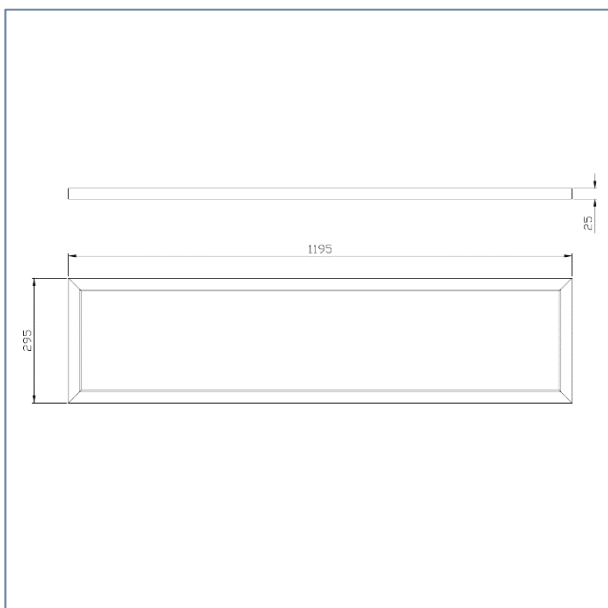

## PHOTOMETRIC CURVE

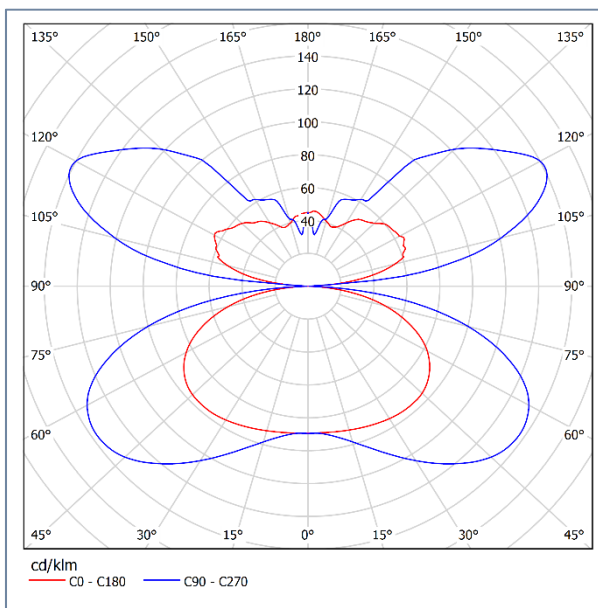

230 V  
50 Hz

