

FENETRE III

F3S.S.T.TM.50.840.H.G



SPECIFICATION TEXT

SUSPENDED MOUNTED FENETRE 3 SQUARE EDGE PROFILE, DIRECT INDIRECT LIGHT DISTRIBUTION (60%, 40%). TRANSFORMATIVE CLEAR /OPAL M OPTIC, LED LIGHT SOURCE, 4000(K) CCT, REMOTE HF ELECTRONIC DRIVER, EXTRUDED ALUMINIUM HOUSING FINISHED SILVER GREY. DIMENSIONS: (LXWXH) 1195 X 295 X 25 MM


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Direct indirect 60 / 40
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Transformative M Type
- Nett luminous flux of luminaire: 5752 lm
- Luminaire efficacy: >115 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 50W
- Driver: Remote HF electronic
- Ingress Protection: IP20
- Emergency:
- Options:

DIMENSIONAL DETAIL

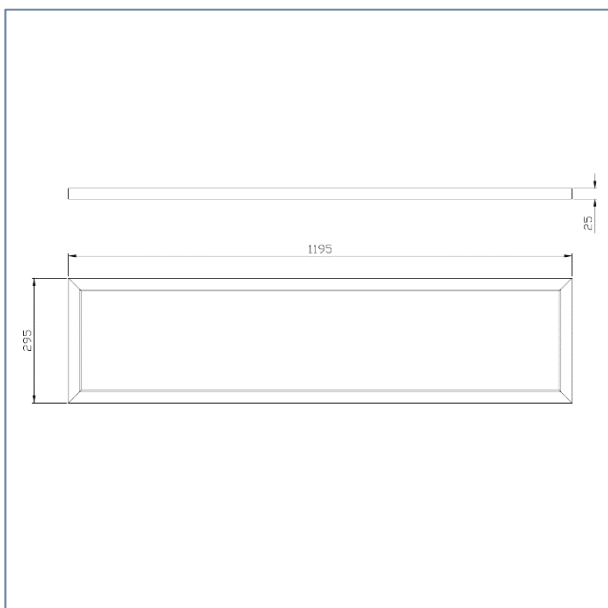

PHOTOMETRIC CURVE

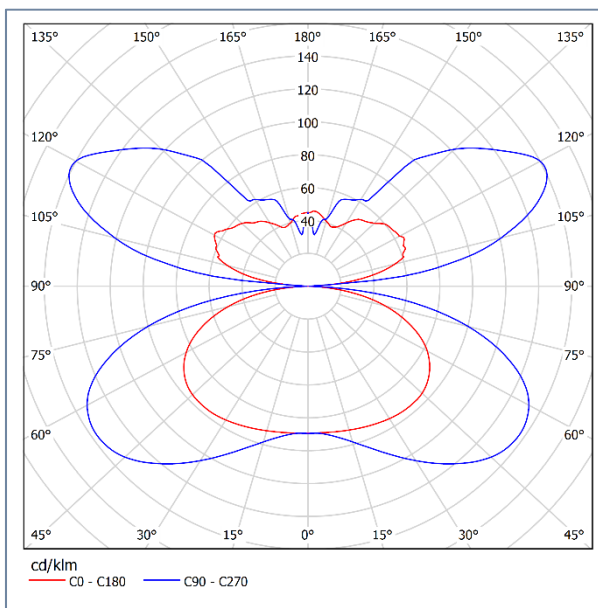

230 V
50 Hz

