

FENETRE III

F3S.S.T.TM.50.8T.TW.G



SPECIFICATION TEXT

SUSPENDED MOUNTED FENETRE 3 SQUARE EDGE PROFILE, DIRECT INDIRECT LIGHT DISTRIBUTION (60%, 40%). TRANSFORMATIVE CLEAR /OPAL M OPTIC, LED LIGHT SOURCE, TUNABLE WHITE) CCT, REMOTE 2 CIRCUIT DRIVER, EXTRUDED ALUMINIUM HOUSING FINISHED SILVER GREY. DIMENSIONS: (LXWXH) 1195 X 295 X 25 MM


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Direct indirect 60 / 40
 - Light Source: LED
 - Colour Temperature: 3000-6000K
 - Optic: Transformative M Type
 - Nett luminous flux of luminaire: 5500 lm **
 - Luminaire efficacy: >110 lm/W **
 - Colour Rendering Index min.: 80 Ra
 - Connected Load: 50W
 - Driver: Remote Tunable 2 circuit
 - Ingress Protection: IP20
 - Emergency:
- ** Dependant on colour temperature

DIMENSIONAL DETAIL

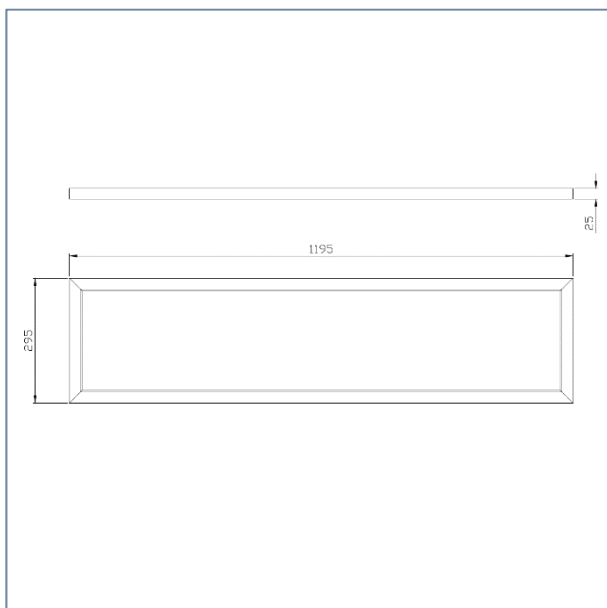

PHOTOMETRIC CURVE

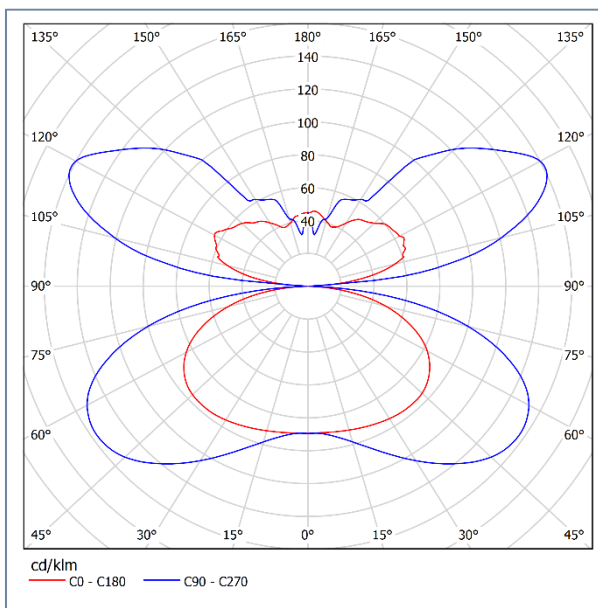

230 V
50 Hz

