

PAX

PAX.C.DN.F.17.840.H.WH



SPECIFICATION TEXT

SURFACE PAX, DIRECT NARROW LIGHT DISTRIBUTION, FROSTED POLYCARBONATE DIFFUSING OPTIC, LED LIGHT SOURCE, 4000K CCT, HF LED DRIVER. ALUMINIUM BODY FINISHED WHITE. DIMENSIONS: (LXWXH) 1205 X 55 X 50MM


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Direct Narrow
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Frosted polycarbonate
- Nett luminous flux of luminaire: 2050 lm
- Luminaire efficacy: >120 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 17W
- Driver: HF electronic
- Ingress Protection: IP20
- Emergency: 3hr Available
- Options: PIR (Add 55mm to length), Suspension

DIMENSIONAL DETAIL

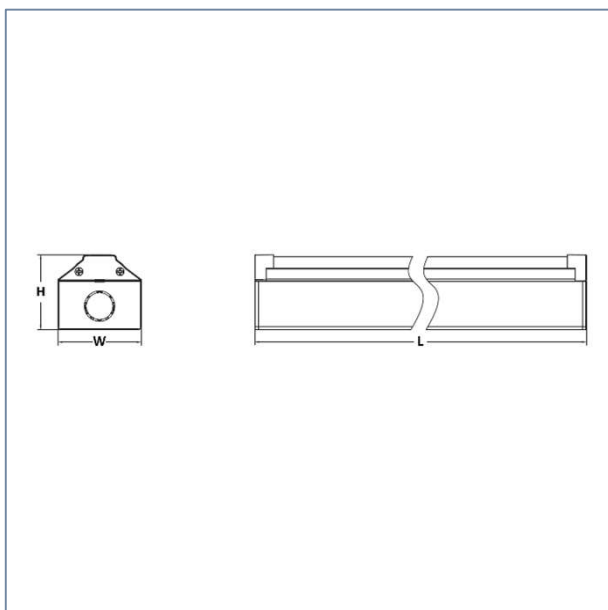

PHOTOMETRIC CURVE

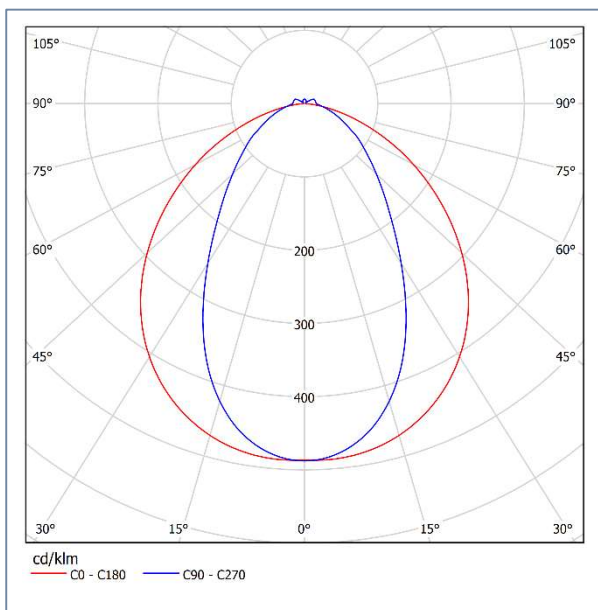

230 V
50 Hz

