

# PAX

PAX.C.DN.F.32.830.H.WH



## SPECIFICATION TEXT

SURFACE PAX, DIRECT NARROW LIGHT DISTRIBUTION, FROSTED POLYCARBONATE DIFFUSING OPTIC, LED LIGHT SOURCE, 3000K CCT, HF LED DRIVER. ALUMINIUM BODY FINISHED WHITE. DIMENSIONS: (LXWXH) 1205 X 55 X 50MM


## PRODUCT IMAGE




## TECHNICAL DETAILS

- Light Distribution: Direct Narrow
- Light Source: LED
- Colour Temperature: 3000K
- Optic: Frosted polycarbonate
- Nett luminous flux of luminaire: 3850 lm
- Luminaire efficacy: >120 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 32W
- Driver: HF electronic
- Ingress Protection: IP20
- Emergency: 3hr Available
- Options: PIR (Add 55mm to length), Suspension

## DIMENSIONAL DETAIL

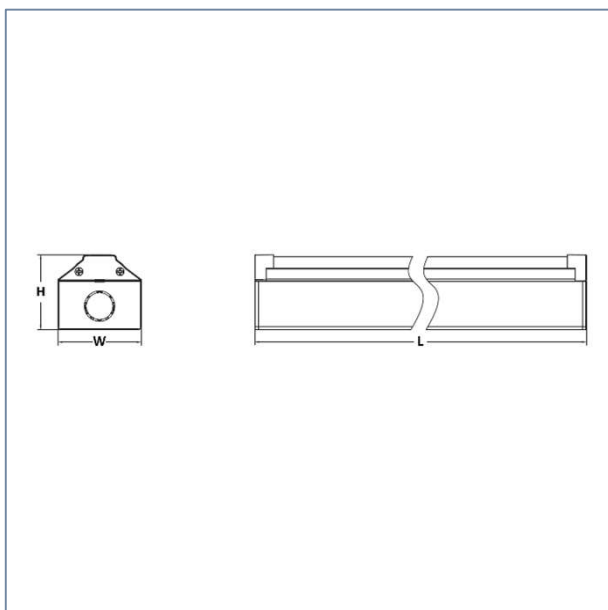

## PHOTOMETRIC CURVE

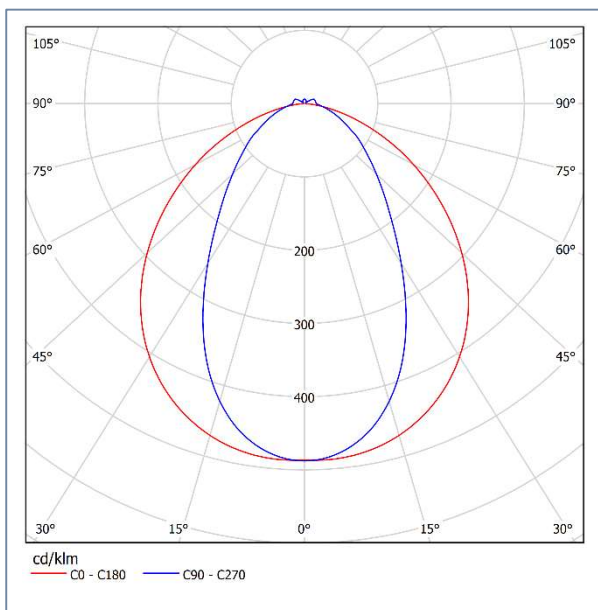

230 V  
50 Hz

