

# PAX

PAX.C.DW.O.56.830.H.WH



## SPECIFICATION TEXT

SURFACE PAX, DIRECT WIDE LIGHT DISTRIBUTION, OPAL POLYCARBONATE DIFFUSING OPTIC, LED LIGHT SOURCE, 3000K CCT, HF LED DRIVER. ALUMINIUM BODY FINISHED WHITE. DIMENSIONS: (LXWXH) 1500 X 55 X 58MM


## PRODUCT IMAGE




## TECHNICAL DETAILS

- Light Distribution: Direct Wide
- Light Source: LED
- Colour Temperature: 3000K
- Optic: Opal polycarbonate
- Nett luminous flux of luminaire: 6700 lm
- Luminaire efficacy: >119 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 56W
- Driver: HF electronic
- Ingress Protection: IP20
- Emergency: 3hr Available
- Options: PIR (Add 55mm to length), Suspension

## DIMENSIONAL DETAIL

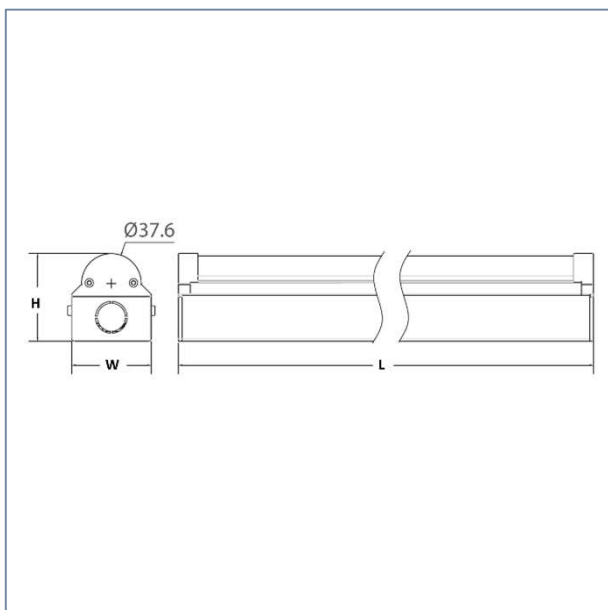

## PHOTOMETRIC CURVE

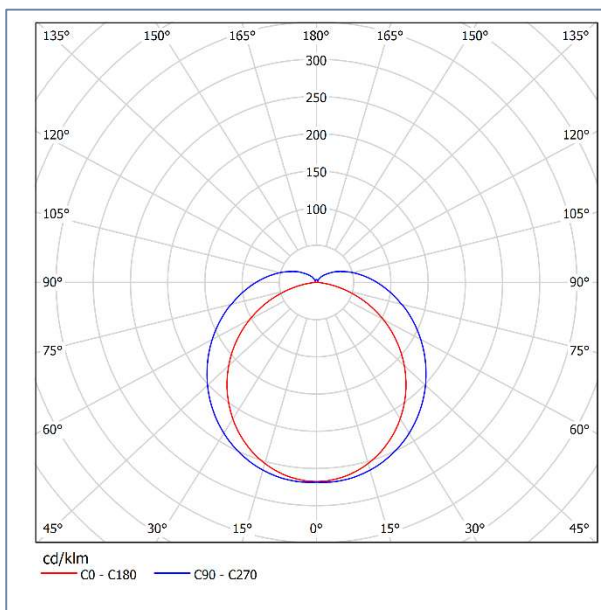

230 V  
50 Hz

