

# QUO140

QUO140.R.D.F.11.830.DALI.WH



## SPECIFICATION TEXT

QUO140, RECESSED DOWNLIGHT, 60 DEG DIRECT LIGHT DISTRIBUTION, FACETED REFLECTOR & LENS OPTIC COMBINATION, UGR <19, LED SOURCE, 3000(K) CCT, DALI LED DRIVER, DIE CAST ALUMINIUM HOUSING & FITTING TRIM, FINISHED WHITE ( RAL9016 ). IP54 RATING. DIMENSIONS: (ØxH) 170 X 55MM CUTOUT Ø140-150MM


## PRODUCT IMAGE




## TECHNICAL DETAILS

- Light Distribution: Direct, 60° Beam Angle
- Optic: Faceted reflector & Lens Optic
- Connected Load: 11W / DC 280mA
- Light Source: LED
- Integral Driver: DALI
- Nett luminous flux of luminaire: 1400lm
- Luminaire efficacy: >127lm/W
- Colour Temperature: 3000K
- MacAdams Ellipse: ≤3 SDCM
- Colour Rendering Index min.: >80 Ra
- Ingress Protection: IP54 below ceiling
- IK Rating: IK08
- Lumen Depreciation: L70 B50 @ 70,000Hrs
- Operating Hours: >50,000Hrs

## DIMENSIONAL DETAIL

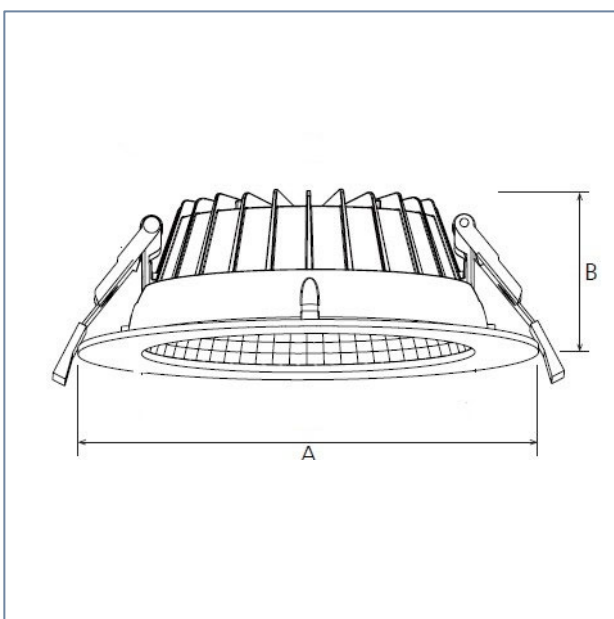

## PHOTOMETRIC CURVE

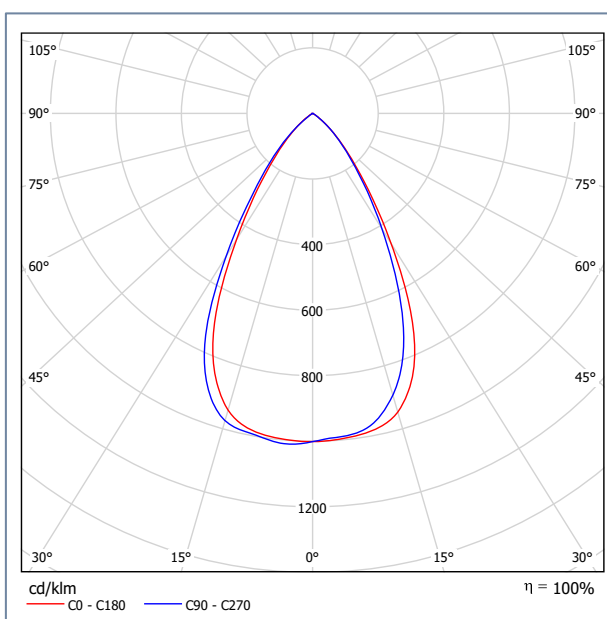

230 V  
50 Hz

