

QUO140

QUO140.R.D.F.16.840.DALI.WH



SPECIFICATION TEXT

QUO140, RECESSED DOWNLIGHT, 60 DEG DIRECT LIGHT DISTRIBUTION, FACETED REFLECTOR & LENS OPTIC COMBINATION, UGR <19, LED SOURCE, 4000(K) CCT, DALI LED DRIVER, DIE CAST ALUMINIUM HOUSING & FITTING TRIM, FINISHED WHITE (RAL9016). IP54 RATING. DIMENSIONS: (ØxH) 170 X 55MM CUTOUT Ø140-150MM


PRODUCT IMAGE




TECHNICAL DETAILS

- Light Distribution: Direct, 60° Beam Angle
- Optic: Faceted reflector & Lens Optic
- Connected Load: 16W / DC 400mA
- Light Source: LED
- Integral Driver: DALI
- Nett luminous flux of luminaire: 2000lm
- Luminaire efficacy: >125lm/W
- Colour Temperature: 4000K
- MacAdams Ellipse: ≤3 SDCM
- Colour Rendering Index min.: >80 Ra
- Ingress Protection: IP54 below ceiling
- IK Rating: IK08
- Lumen Depreciation: L70 B50 @ 70,000Hrs
- Operating Hours: >50,000Hrs

DIMENSIONAL DETAIL

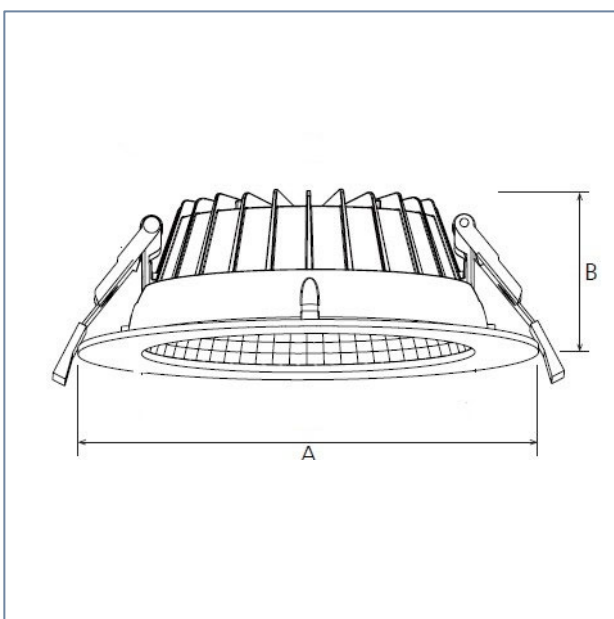

PHOTOMETRIC CURVE

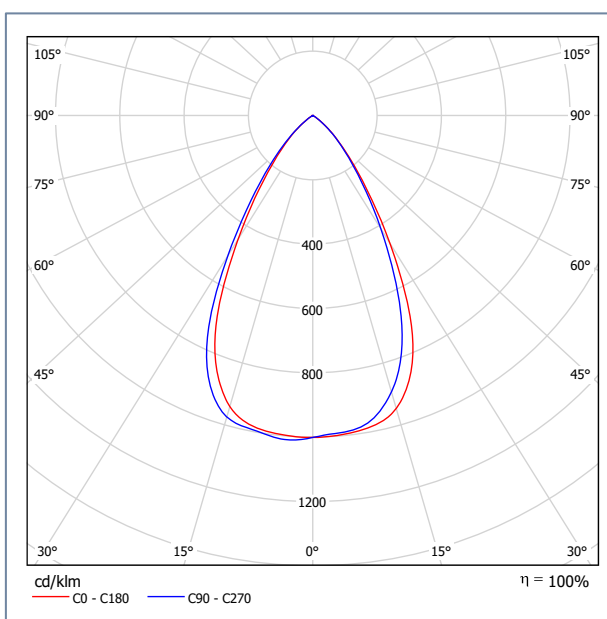

230 V
50 Hz

