

# WHO

## WHO.C.T.O.40.830.H.WH



### SPECIFICATION TEXT

SURFACE WHO, DIRECT INDIRECT LIGHT DISTRIBUTION, OPAL DIFFUSING OPTIC, LED LIGHT SOURCE, 3000K CCT, HF LED DRIVER. STEEL & ALUMINIUM HOUSING FINISHED WHITE. DIMENSIONS: (ØXH) 500 X 130MM


### PRODUCT IMAGE




### TECHNICAL DETAILS

- Light Distribution: Direct Indirect
- Light Source: LED
- Colour Temperature: 3000K
- Optic: Opal
- Nett luminous flux of luminaire: 4000 lm
- Luminaire efficacy: >100 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 40W
- Driver: HF electronic
- Ingress Protection: IP20
- Emergency: Remote Only
- Options:

### DIMENSIONAL DETAIL

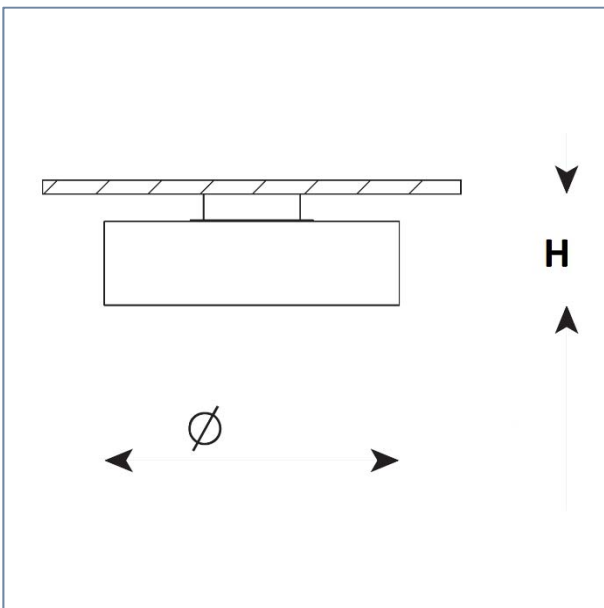

### PHOTOMETRIC CURVE

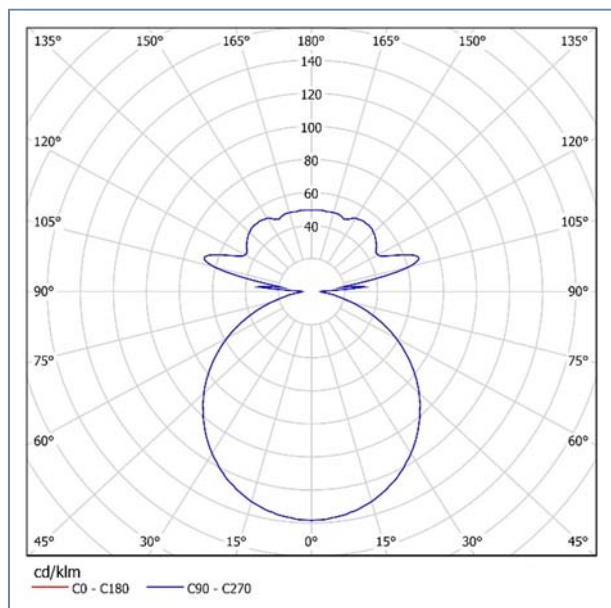

230 V  
50 Hz

