

# WHO

WHO.S.T.O.172.840.H.WH



## SPECIFICATION TEXT

SUSPENDED WHO, DIRECT INDIRECT LIGHT DISTRIBUTION, OPAL DIFFUSING OPTIC, LED LIGHT SOURCE, 4000K CCT, HF LED DRIVER. STEEL & ALUMINIUM HOUSING FINISHED WHITE. DIMENSIONS: (ØXH) 1250 X 150MM


## PRODUCT IMAGE




## TECHNICAL DETAILS

- Light Distribution: Trizonal
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Opal
- Nett luminous flux of luminaire: 21200 lm
- Luminaire efficacy: >123 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 172W
- Driver: HF electronic
- Ingress Protection: IP20
- Emergency: Remote Only
- Options:

## DIMENSIONAL DETAIL

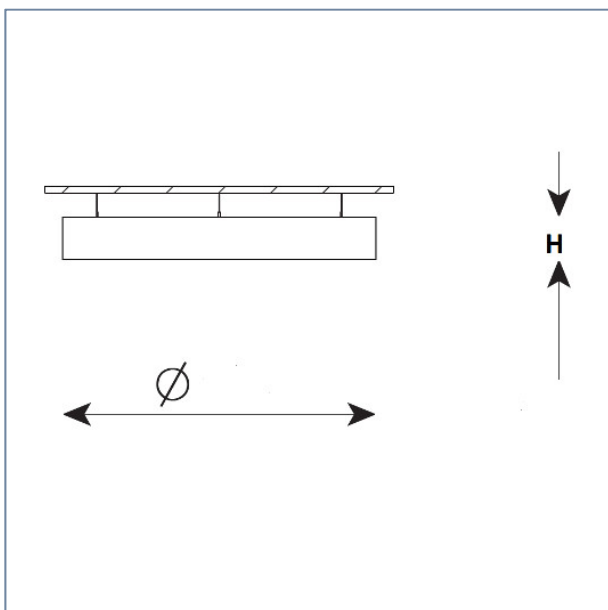

## PHOTOMETRIC CURVE

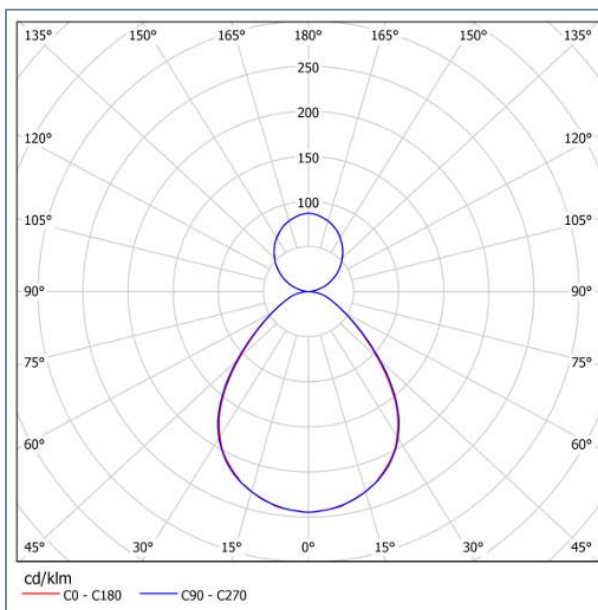

230 V  
50 Hz

