

# WHO

WHO.S.T.O.21.830.H.WH



## SPECIFICATION TEXT

SUSPENDED WHO, DIRECT INDIRECT LIGHT DISTRIBUTION, OPAL DIFFUSING OPTIC, LED LIGHT SOURCE, 3000K CCT, HF LED DRIVER. STEEL & ALUMINIUM HOUSING FINISHED WHITE. DIMENSIONS: (ØXH) 300 X 100MM


## PRODUCT IMAGE




## TECHNICAL DETAILS

- Light Distribution: Trizonal
- Light Source: LED
- Colour Temperature: 3000K
- Optic: Opal
- Nett luminous flux of luminaire: 2000 lm
- Luminaire efficacy: >95 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 21W
- Driver: HF electronic
- Ingress Protection: IP20
- Emergency: Remote Only
- Options:

## DIMENSIONAL DETAIL

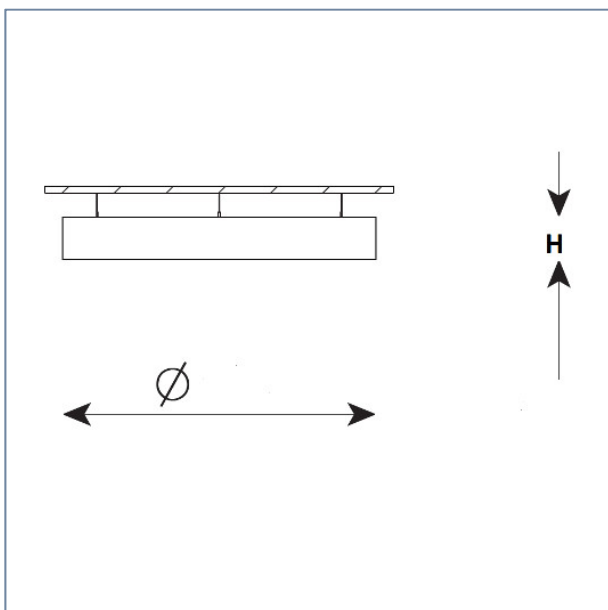

## PHOTOMETRIC CURVE

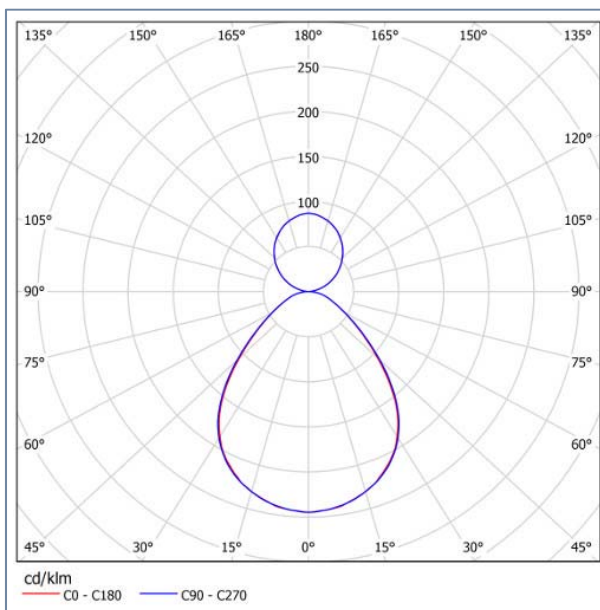

230 V  
50 Hz

